

API REST V1 de IIB 10 IBM Integration BUS 10

- https://iib_gui:port/apiv1/executiongroups
- https://iib_gui:port/apiv1/executiongroups/IS_Example
- https://iib_gui:port/apiv1/executiongroups/IS_Example/applications
- https://iib_gui:port/apiv1/executiongroups/IS_Example/applications/APP_Example
- https://iib_gui:port/apiv1/executiongroups/IS_Example/applications/APP_Example/messageflows?depth=2

Por defecto


- port: 4414

APIS y Paths completos

- https://www.ibm.com/support/knowledgecenter/en/SSMKHH_10.0.0/com.ibm.etools.mft.restapi.doc/index.html

Consumir el API desde SoapUI en JSON

_1. Agregar autenticación Basic y colocar el username y password

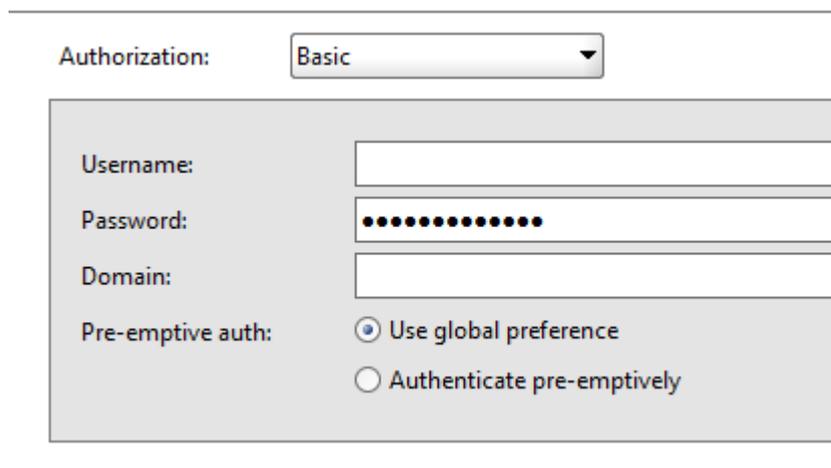

The image shows a dialog box for Basic authentication in SoapUI. At the top, there is a label 'Authorization:' followed by a dropdown menu set to 'Basic'. Below this, there are four input fields: 'Username:' (empty), 'Password:' (filled with 12 black dots), and 'Domain:' (empty). At the bottom, there is a 'Pre-emptive auth:' section with two radio buttons: 'Use global preference' (which is selected) and 'Authenticate pre-emptively'.

_2. Agregar en el request header el tipo de consumo «application/json»

Header	Value
Accept	application/json

ArquitecturaIBM Consulting

