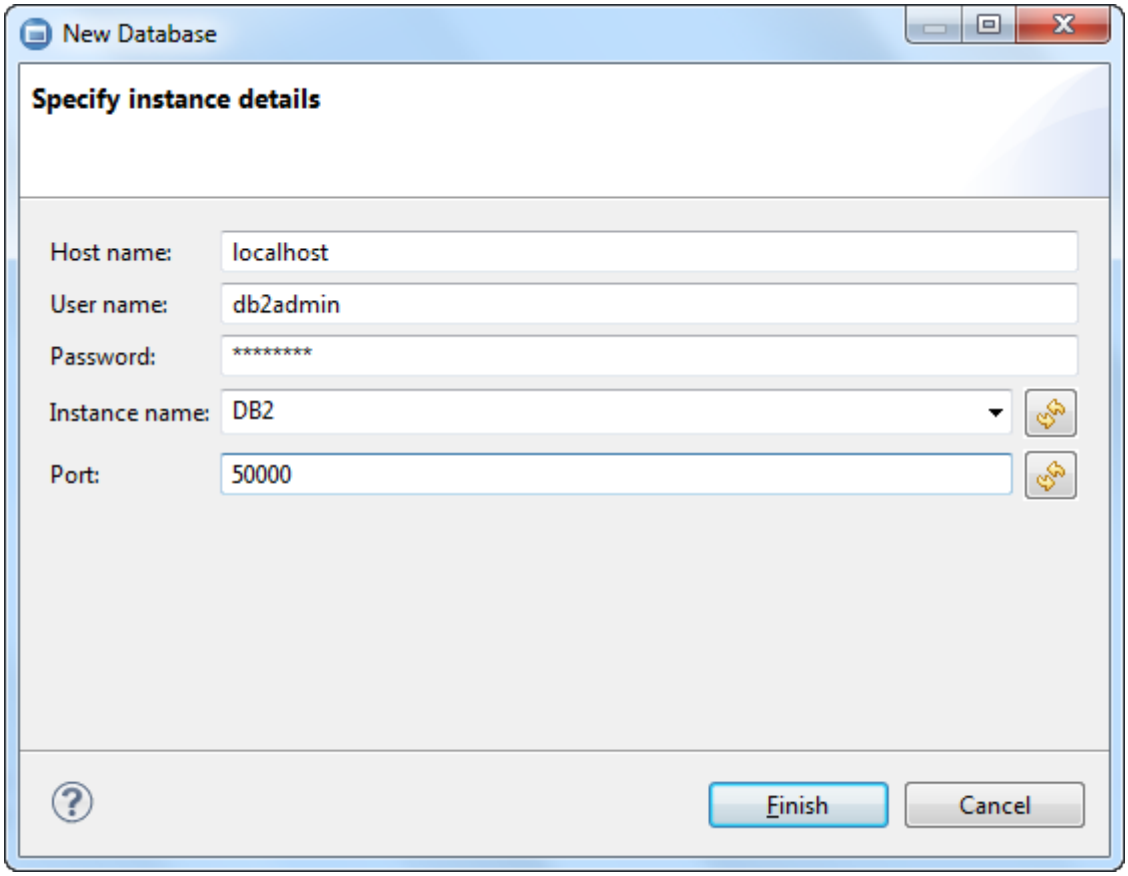
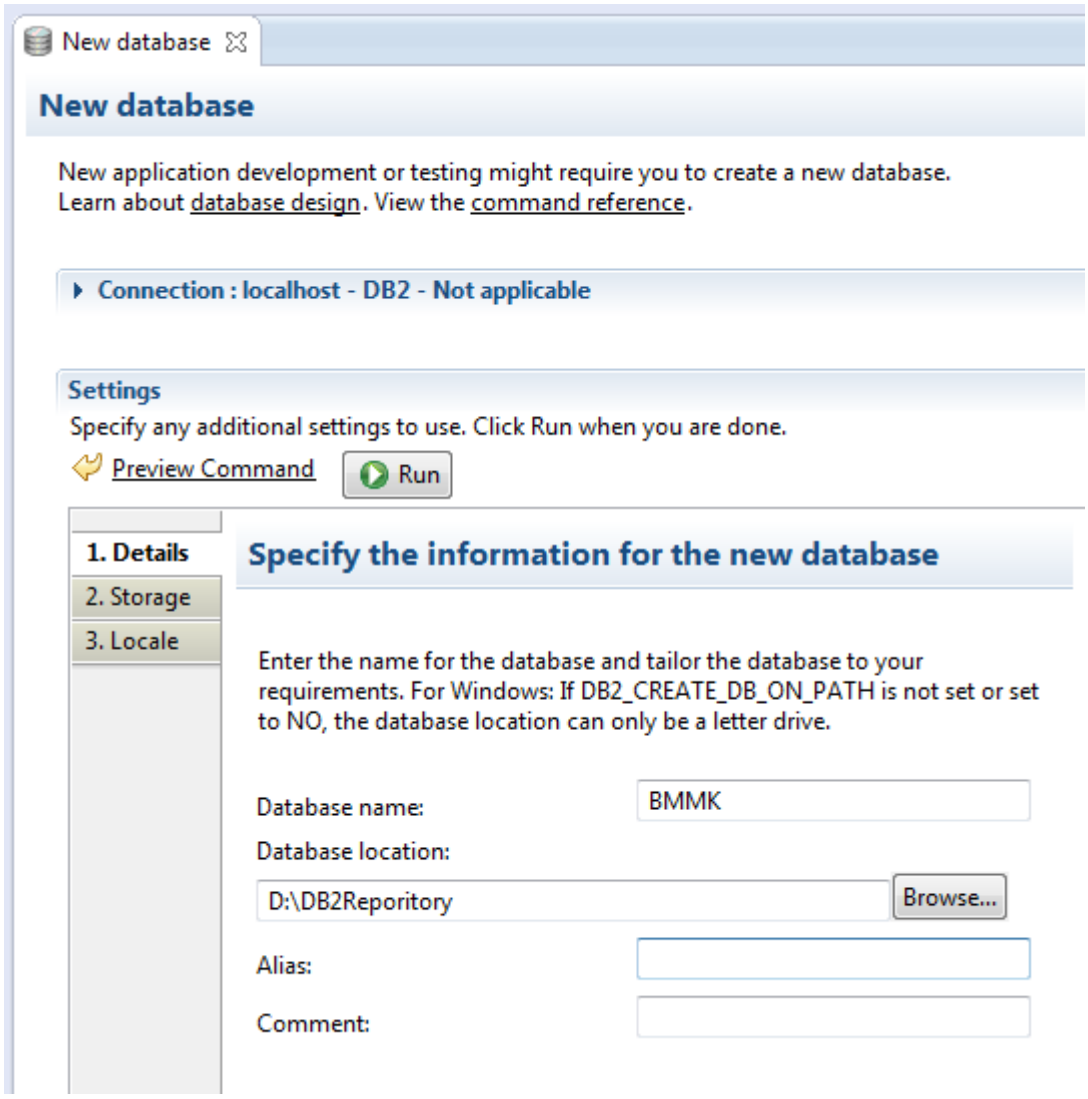
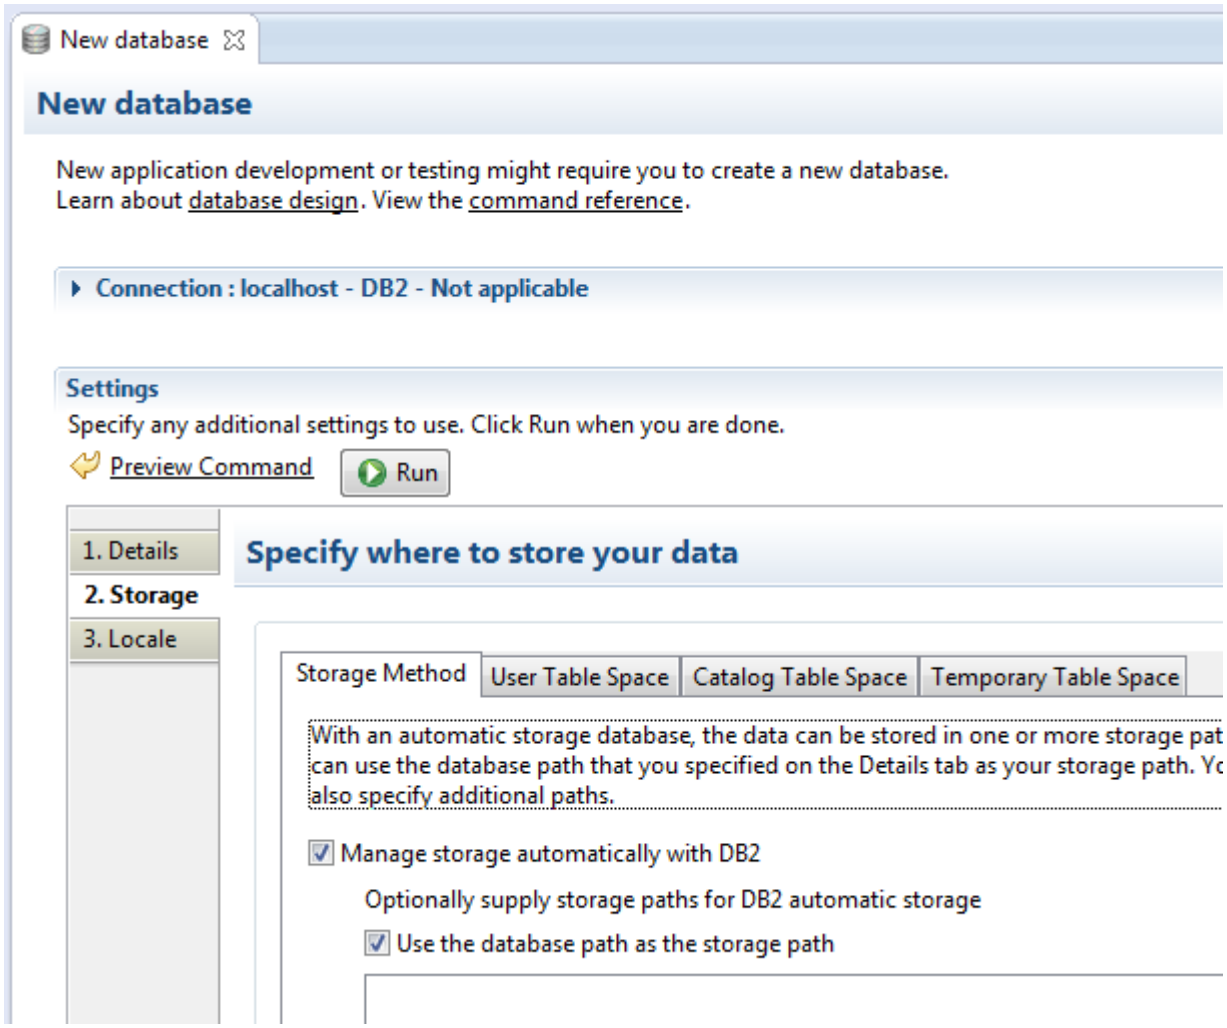
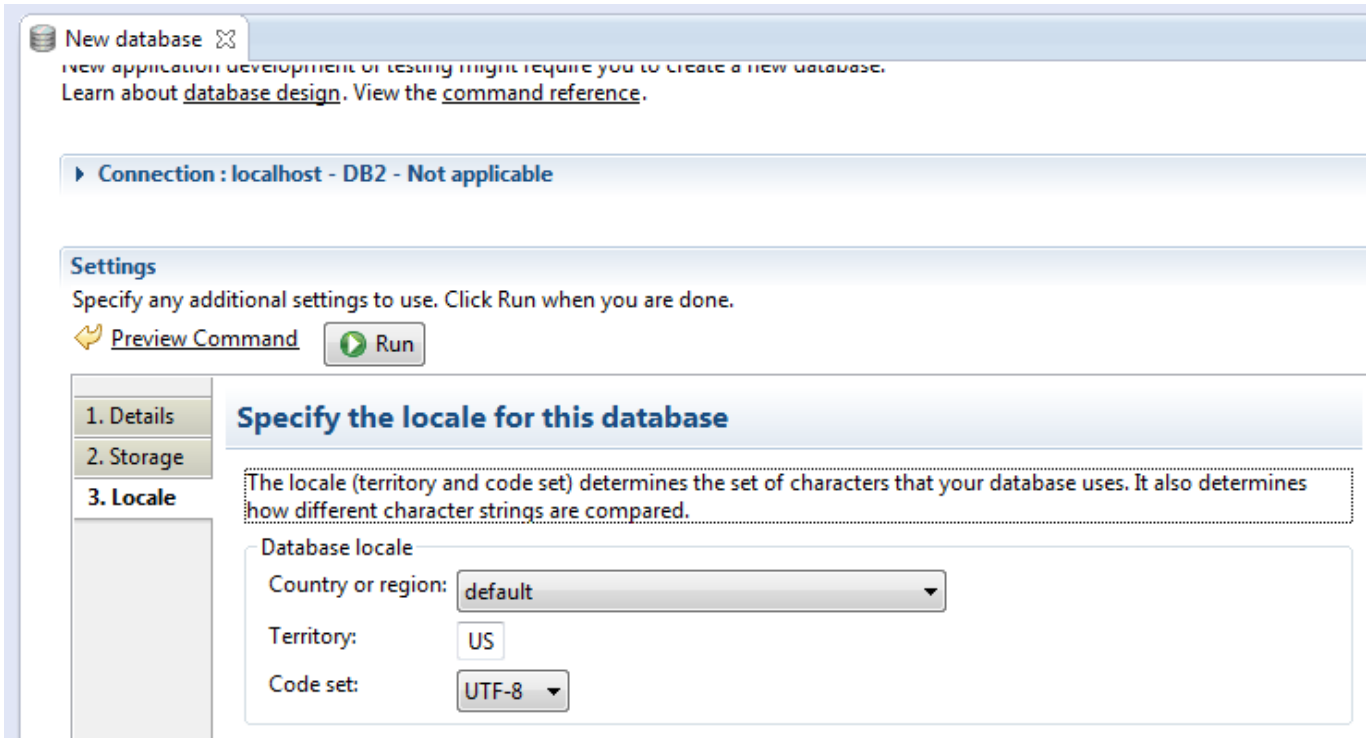



Primero debemos de tener instalado DB2 10.5 Copy1 y luego DB2 Data Studio y luego cuando presionemos sobre «New Database».

- **Host name**: localhost
- **User name**: db2admin
- **Password**: DB2
- **Port**: 50000


New database
New database
New application development or testing might require you to create a new database.
Learn about database design. View the command reference.
Connection : localhost - DB2 - Not applicable
Settings
Specify any additional settings to use. Click Run when you are done.
Preview Command
Run
1. Details
2. Storage
3. Locale
Specify the information for the new database
Enter the name for the database and tailor the database to your requirements. For Windows: If DB2_CREATE_DB_ON_PATH is not set or set to NO, the database location can only be a letter drive.
Database name:
BMMK
Database location:
D:\DB2Reporitory
Browse...
Alias:
Comment:


New database
New database
New application development or testing might require you to create a new database.
Learn about database design. View the command reference.
Connection : localhost - DB2 - Not applicable
Settings
Specify any additional settings to use. Click Run when you are done.
Preview Command
Run
1. Details
2. Storage
3. Locale
Specify where to store your data
Storage Method
User Table Space
Catalog Table Space
Temporary Table Space
With an automatic storage database, the data can be stored in one or more storage pat
can use the database path that you specified on the Details tab as your storage path. Yo
also specify additional paths.
Manage storage automatically with DB2
Optionally supply storage paths for DB2 automatic storage
Use the database path as the storage path


New database
Learn about database design. View the command reference.
Connection : localhost - DB2 - Not applicable
Settings
Specify any additional settings to use. Click Run when you are done.
Preview Command
Run
1. Details
2. Storage
3. Locale
Specify the locale for this database
The locale (territory and code set) determines the set of characters that your database uses. It also determines how different character strings are compared.
Database locale
Country or region:
default
Territory:
US
Code set:
UTF-8

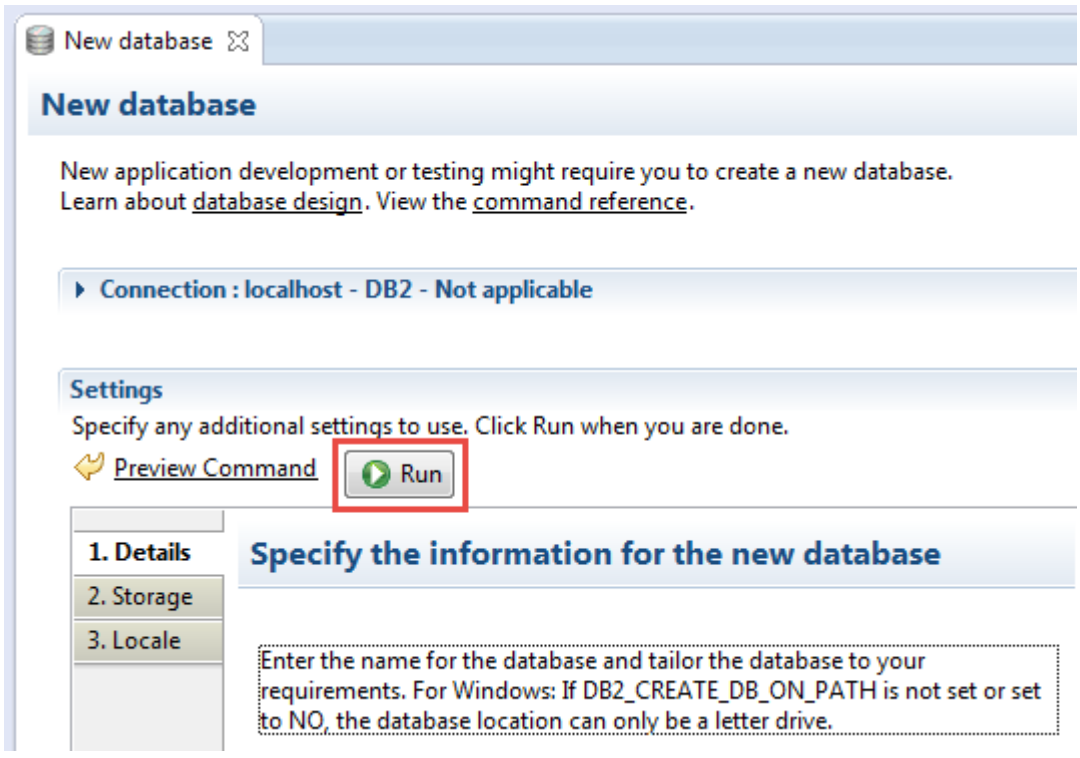
New database
New database
New application development or testing might require you to create a new database.
Learn about database design. View the command reference.
Connection : localhost - DB2 - Not applicable
Settings
Specify any additional settings to use. Click Run when you are done.
Preview Command
Run
1. Details
2. Storage
3. Locale
Specify the information for the new database
Enter the name for the database and tailor the database to your requirements. For Windows: If DB2_CREATE_DB_ON_PATH is not set or set to NO, the database location can only be a letter drive.

