

\_1. Descargar **kubectl** desde la web de kubernetes:  
<https://kubernetes.io/docs/tasks/tools/install-kubectl-windows/>

## Install kubectl on Windows

The following methods exist for installing kubectl on Windows:

- [Install kubectl binary with curl on Windows](#)
- [Install on Windows using Chocolatey, Scoop, or winget](#)

### Install kubectl binary with curl on Windows [↔](#)


1. Download the [latest release v1.26.0](#).

Or if you have `curl` installed, use this command:


```
curl.exe -LO "https://dl.k8s.io/release/v1.26.0/bin/windows/amd64/kubectl.exe"
```

**Note:** To find out the latest stable version (for example, for scripting), take a look at <https://dl.k8s.io/release/stable.txt>.

\_2. Ubicar el archivo «**kubectl.exe**» en una carpeta de la unidad **C**

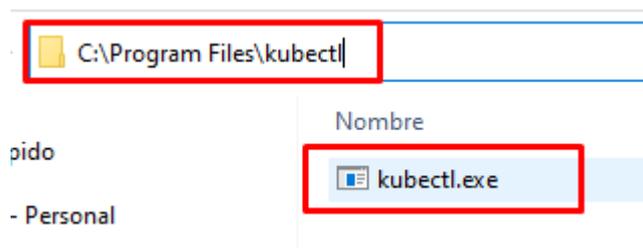

\_3. Configurar la variable de sistema «**Path**»

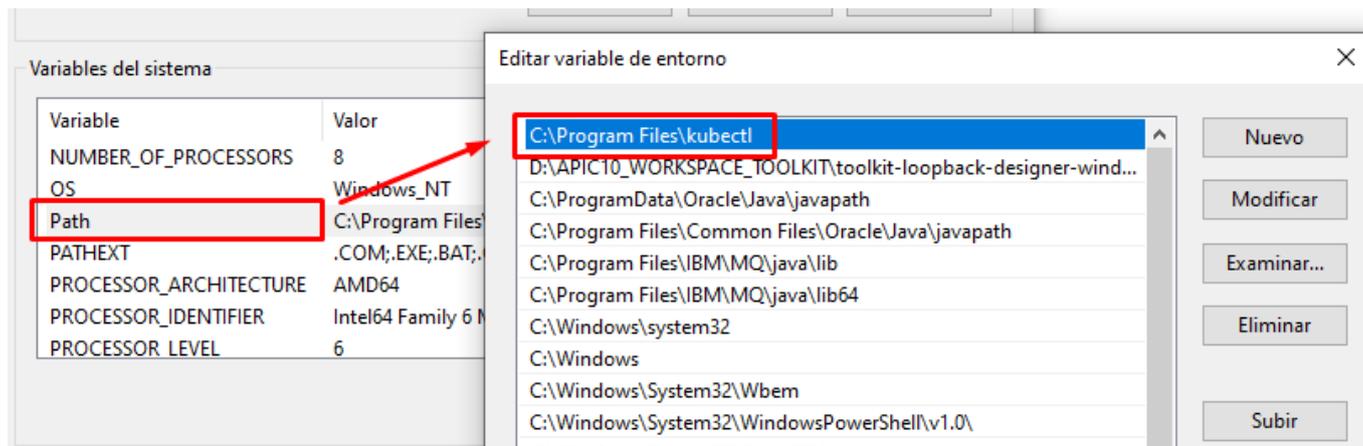

## Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn: <https://www.linkedin.com/in/juliopari/>