



Portlet WEF que tiene 2 páginas, en la **pagina1** se ingresa un texto y al presionar en el botón se muestra la **pagina2** con el texto ingresado.

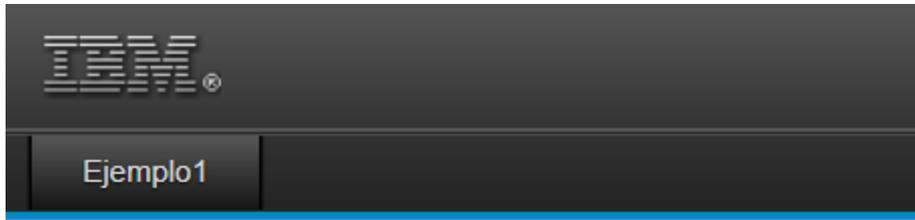

Pagina 1

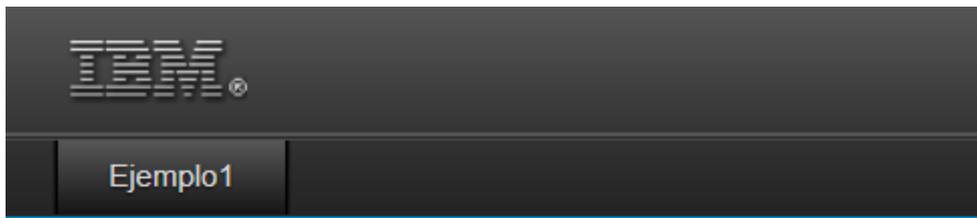

Pagina 2

Texto salida1:
Texto salida2: juliopari

WEF85_Ejemplo1

Portlet Adapter

Allows you to expose profile values for customization when the model is used as a portlet.

Properties

| | |
|---------------------|---|
| Name * | WEF85_Ejemplo1 |
| Portlet Title | WEF85_Ejemplo1 |
| Portlet Short Title | |
| Portlet Keywords | |
| Portlet Description | Descripcion de WEF85_Ejemplo1 |
| Default Locale | en |
| Additional Locales | en |
| User Help File |  |

main

Action List

Creates an ordered list of actions to be executed. Action lists can be nested.

Properties

| | |
|--------|--|
| Name * |  main |
|--------|--|

Arguments

| | | | | | | | |
|--|---|--|--|---|---|---|---|
| Return Type |  Object | | | | | | |
| Actions | <table border="1"><tr><td> ActionList</td><td></td></tr><tr><td> page1</td><td></td></tr><tr><td></td><td></td></tr></table> |  ActionList | |  page1 |  |  |  |
|  ActionList | | | | | | | |
|  page1 |  | | | | | | |
|  |  | | | | | | |

txt_entrada1

Text Input

Creates a text input control at a named tag or other location on a page or pages.

Properties

Name: txt_entrada1

Page Location

Location Technique: On Named Tag Relative to Named Tag Advanced

Page *: page1

Tag *: entrada1

Text: \${Variables/var_textoIngresado}

Display type: Normal

page1

Page

Creates a new HTML page in a model, primarily for prototyping purposes. In deployment, the Imported Page builder is recommended instead of this builder.

Properties

Name *: page1

Page Contents (HTML) *

```
<html>
  <body>
    <h1>Pagina 1</h1>
    <form name="myForm1" method="post">
      <div>
        <span name="entrada1"></span>
        <span name="boton1"></span>
      </div>
    </form>
  </body>
</html>
```

page2

Page

Creates a new HTML page in a model, primarily for prototyping purposes. In deployment, the Imported Page builder is recommended instead of this builder.

► **Properties**

Name *

Page Contents (HTML) *

```
<html>
  <body>
    <h1>Pagina 2</h1>
    <form name="myForm2" method="post">
      <div>
        Texto salida1: <span name="salida1"></span> <br/>
        Texto salida2: <span name="salida2"></span> <br/>
        <span name="boton_regresar"></span>
      </div>
    </form>
  </body>
</html>
```

ljo_ejemplo1

Linked Java Object Show details

Exposes the public methods in a Java Class for use in the current model.

► **Properties**

Name *

Class Name *

► **Overwriting**

► **Advanced**

The screenshot displays the IBM Web Experience Factory interface. At the top, there are two tabs: 'model1.model' and 'Ejemplo1.java'. The Java code in 'Ejemplo1.java' is as follows:

```
1 package com.empresa.actions;
2
3 import com.bowstreet.webapp.WebAppAccess;
4
5 public class Ejemplo1{
6
7     public void procesarEjemplo1(WebAppAccess webAppAccess, String texto) {
8         webAppAccess.getVariables().setString("var_textoIngresado", texto);
9         webAppAccess.processPage("page2");
10    }
11
12    public void procesarIrPagina1(WebAppAccess webAppAccess) {
13        webAppAccess.processPage("page1");
14    }
15
16 }
17
```

Below the code editor, a widget configuration panel is visible for a widget named 'txt_salida1'. The configuration includes:

- Name:** txt_salida1
- Page Location:**
 - Location Technique: On Named Tag Relative to Named Tag Advanced
 - Page *:
 - Tag *:
- Text:**
- Display type:**

txt_salida2

Text

Displays text at a named tag or other location on a page or pages.

Properties

| | |
|----------------------|--|
| Name | txt_salida2 |
| Page Location | |
| Location Technique: | <input checked="" type="radio"/> On Named Tag <input type="radio"/> Relative to Named Tag <input type="radio"/> Advanced |
| Page * | page2 |
| Tag * | salida2 |
| Text | <code>{Variables/var_textoIngresado}</code> |
| Lookup Table Used | None |
| Text Format | Allow HTML formatting of text (Output string unmodified) |
| Replace Tag Contents | <input checked="" type="checkbox"/> |

btn_boton1

Button

Adds a button control to a named tag or other location on a page or pages. Hook a button up to an action to call a method, load a page, etc.

Properties

| | |
|---------------------|--|
| Name | btn_boton1 |
| Page Location | |
| Location Technique: | <input checked="" type="radio"/> On Named Tag <input type="radio"/> Relative to Named Tag <input type="radio"/> Advanced |
| Page * | page1 |
| Tag * | boton1 |
| Label | Enviar |
| Action Type | Submit form and invoke action |
| Action | ljo_ejemplo1.procesarEjemplo1 |
| Form Name | |

Arguments

Specify Name / Value pairs of inputs to actions (only applicable for actions that accept arguments).

Arguments

Specify Name / Value pairs of inputs to actions (only applicable for actions that accept arguments).

Input Mappings

| Name | Value |
|------------------------------------|---------------------|
| ljo_ejemplo1.procesarEjemplo1_Arg1 | \${Inputs/entrada1} |
| | |

Evaluate arguments

When the action is run As the page is rendered

Post-Action Behavior

HTML Attributes

Theme and Styles

Advanced

btn_boton2

Button

Adds a button control to a named tag or other location on a page or pages. Hook a button up to an action to call a method, load a page, etc.

Properties

Name: btn_boton2

Page Location

Location Technique: On Named Tag Relative to Named Tag Advanced

Page *: page2

Tag *: boton_regresar

Label: Ir a pagina 1

Action Type: Submit form and invoke action

Action: ljo_ejemplo1.procesarIrPagina1

Form Name:

Arguments

Specify Name / Value pairs of inputs to actions (only applicable for actions that accept arguments).

Input Mappings

| Name | Value |
|------|-------|
| | |
| | |
| | |

Post-Action Behavior

HTML Attributes

Theme and Styles

Advanced

var_textoIngresado

Variable

Creates a variable of different types. Add a schema builder to enable creation of more complex types.

Properties

| | |
|---------------|--------------------|
| Name * | var_textoIngresado |
| Type * | String |
| Initial Value | |

ArquitecturaIBM Consulting

