


## Postman

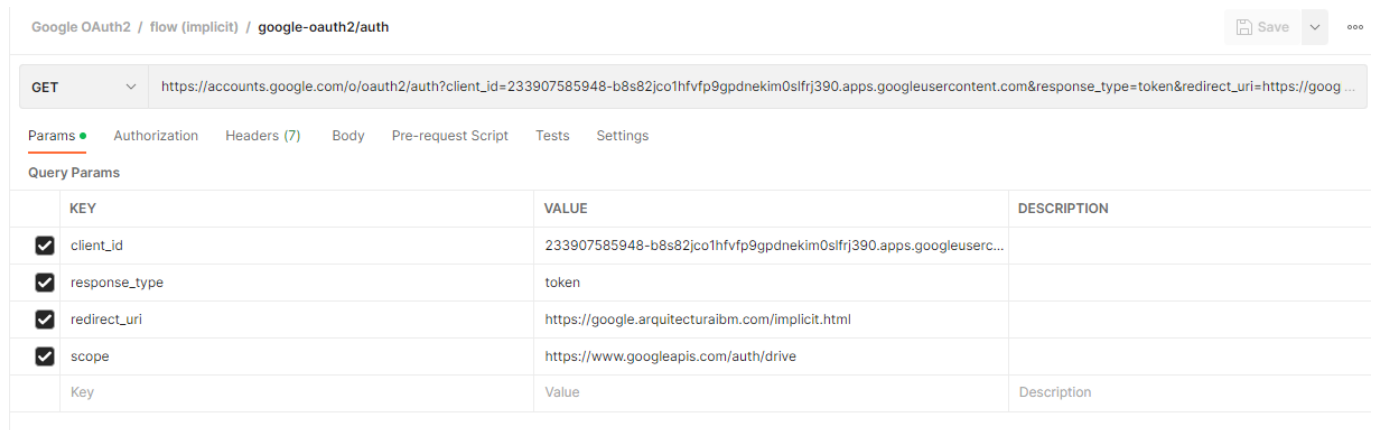


The screenshot shows a Postman interface for a GET request. The URL is `https://accounts.google.com/o/oauth2/auth?client_id=233907585948-b8s82jco1hfvfp9gpdnekim0slfrj390.apps.googleusercontent.com&response_type=token&redirect_uri=https://goog...`. The 'Query Params' tab is active, displaying a table with the following data:

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> client_id	233907585948-b8s82jco1hfvfp9gpdnekim0slfrj390.apps.googleuserc...	
<input checked="" type="checkbox"/> response_type	token	
<input checked="" type="checkbox"/> redirect_uri	https://google.arquitecturaibm.com/implicit.html	
<input checked="" type="checkbox"/> scope	https://www.googleapis.com/auth/drive	
Key	Value	Description

**Paso 1:** URL, ir a un navegador y colocar

`https://accounts.google.com/o/oauth2/auth?client_id=233907585948-b8s82jco1hfvfp9gpdnekim0slfrj390.apps.googleusercontent.com&response_type=token&redirect_uri=https://google.arquitecturaibm.com/implicit.html&scope=https://www.googleapis.com/auth/drive`

**Paso 2:** Va a redireccionar a una URL y entregará el `access_token`



The browser address bar shows the URL: `google.arquitecturaibm.com/implicit.html#access_token=ya29.a0AVvZVsr3cqu1_BtpZQt1InVMVuG40TmmLdoAHMPdpGsg03uCWLZuuxQjecFG...`

## Google OAuth2 Flow Implicit

- `access_code` :
  - `ya29.a0AVvZVsr3cqu1_BtpZQt1InVMVuG40TmmLdoAHMPdpGsg03uCWLZuuxQjecFGJIP8FFORcB22Q5dnxAwv7cjr4FR_V2NU3oNEfDfOncZKtDp2vVDZSSg0165`
- `token_type` :
  - Bearer
- `expires_in` :
  - 3599
- `scope` :
  - `https://www.googleapis.com/auth/drive`

**Paso 3:** Se podrá setear en Bearer Token para invocar a una API Servicio de Google

GET <https://www.googleapis.com/drive/v3/files>

Params Authorization Headers (7) Body Pre-request Script Tests Settings

Type: Bearer Token

Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, w  
Learn more about [variables](#)

The authorization header will be automatically generated when you send the request. Learn more about [authorization](#)

Token: ya29.a0AVvZVsr3cqu1\_BtpZQt1InVMVuG40...

Body Cookies Headers (13) Test Results Security Status: 200 OK Time: 416

Pretty Raw Preview Visualize JSON

```
1 {
2   "kind": "drive#fileList",
3   "incompleteSearch": false,
4   "files": [
5     {
6       "kind": "drive#file",
7       "mimeType": "video/mp4",
8       "id": "1pnxA7PLtJ0r6J4x0wDKoNt4ZM0D9Xilf",
9       "name": "Curso AWS (2022-08-03 18:03 GMT-4)"
10    },
11    {
12      "kind": "drive#file",
13      "mimeType": "text/plain",
14      "id": "1zU0lgTSajBy2wDq059P6nMp9UY5LxErw",
15      "name": "Curso AWS (2022-08-03 18:03 GMT-4)"
16    }
17  ]
18 }
```

## Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn: <https://www.linkedin.com/in/juliopari/>