
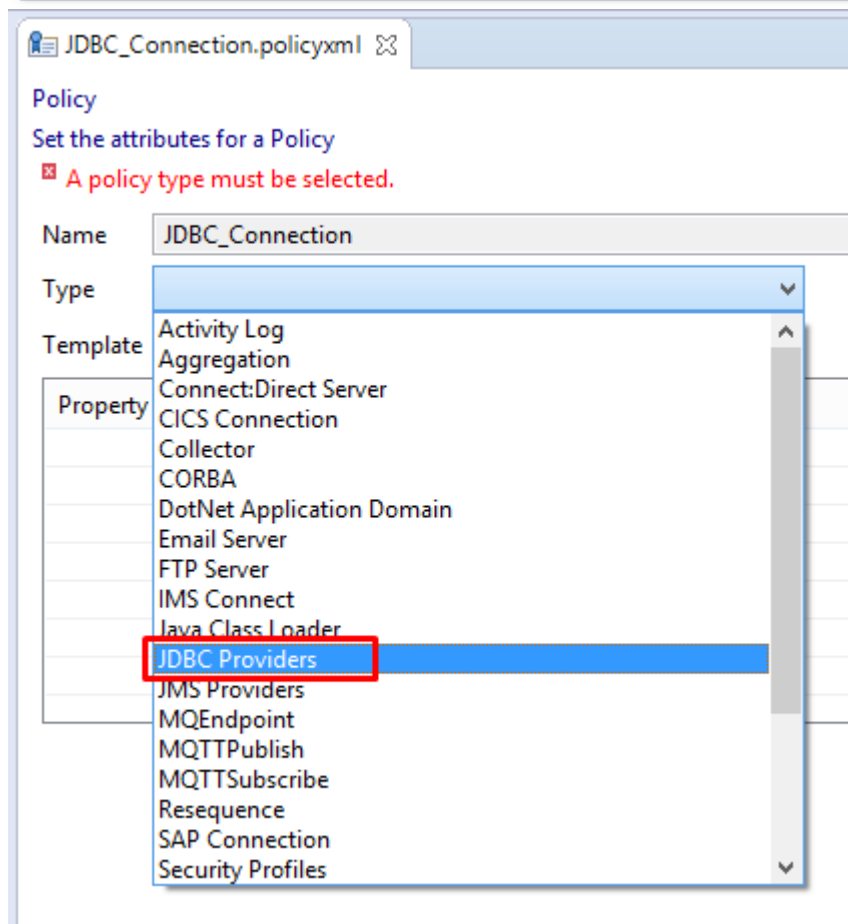


JDBC_Policy
(New...)

New Artifact
Create a new artifact.

- Policy
- WS Policy Sets and Bindings

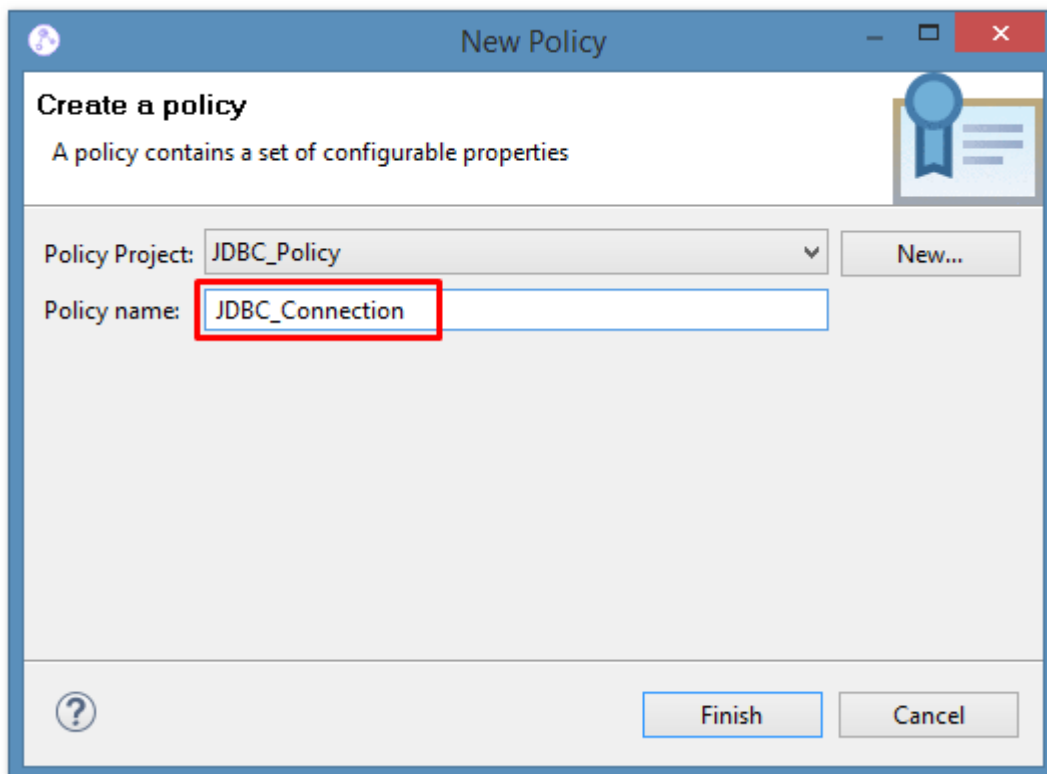

*JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

The property "Name of the database" requires a value to be specified.

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

Property	DB2_91_Windows	
Name of	DB2_91_Linux	
Type of	Oracle_Windows	
Version of	Oracle	
JDBC driv	Sybase_Windows	acleDriver
JDBC typ	Sybase	client.OracleXADataSource
Connecti	Microsoft SQL Server	in:[user]/[password]@[serverName]:[p...
Connecti	Informix_Windows	
Connecti	Informix	
Connecti	Informix_Windows_With_Date_Format_Windows	
Connecti	Informix_Windows_With_Date_Format	
Connecti	Teradata_Windows	
Connecti	Teradata	
Connecti	SolidDB_Windows	
Connecti	SolidDB	
Database	MySQL_57	ase_Server_Name
Database server port number*	1521	
Type 4 driver class JARs URL	<ORACLE HOME>\jdbc\lib	
Name of the database schema	useProvidedSchemaNames	
Data source description		

JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

The property "Name of the database" requires a value to be specified.

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

Property	Value
Name of the database*	EXAMPLE
Type of the database	Oracle
Version of the database	
JDBC driver class name*	oracle.jdbc.OracleDriver
JDBC type 4 data source class name*	oracle.jdbc.xa.client.OracleXADataSource
Connection URL format*	jdbc:oracle:thin:[user]/[password]@[serverName]:[p...
Connection URL format attribute 1	<SID>
Connection URL format attribute 2	
Connection URL format attribute 3	
Connection URL format attribute 4	
Connection URL format attribute 5	
Database server name*	default_Database_Server_Name
Database server port number*	1521
Type 4 driver class JARs URL	<ORACLE HOME>\\jdbc\\lib
Name of the database schema	useProvidedSchemaNames
Data source description	

Configuración JDBC

JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

Property	Value
Name of the database*	EXAMPLE
Type of the database	Oracle
Version of the database	
JDBC driver class name*	oracle.jdbc.OracleDriver
JDBC type 4 data source class name*	oracle.jdbc.xa.client.OracleXADataSource
Connection URL format*	jdbc:oracle:thin:[user]/[password]@[serverName]:[p...
Connection URL format attribute 1	<SID>
Connection URL format attribute 2	
Connection URL format attribute 3	
Connection URL format attribute 4	
Connection URL format attribute 5	
Database server name*	default_Database_Server_Name
Database server port number*	1521
Type 4 driver class JARs URL	<ORACLE HOME>\jdbc\lib
Name of the database schema	useProvidedSchemaNames
Data source description	
Maximum size of connection pool	0
Security identity (DSN)	default_User@default_Server
Environment parameters	
Supports XA coordinated transactions	true
Use JAR files that have been deployed in a .bar file	false

Configuración CICS

CICS_Connetion.policyxml

Policy
Set the attributes for a Policy

Name

Type

Template

Property	Value
CICS server	
CICS Transaction Gateway URL	local:
CICS APPLID	
CICS APPLID qualifier	
Connection timeout (seconds)	30
Request timeout (seconds)	120
Security identity (DSN)	
Integration server used for XA recovery	

Configuración FTP

FTP_Connection.policyxml

Policy
Set the attributes for a Policy

Name

Type

Template

Property	Value
FTP server name*	aprendeibm
Account information	
Remote FTP server directory	
FTP security identity	
Transfer mode	BINARY
Scan delay (seconds)	60
Connection type	PASSIVE
Strict host key checking	false
Encryption ciphers	
Compression level	0
Remote transfer protocol	FTP
Location of the known hosts file	
Message authentication code	
Timeout (seconds)	0
Preserve remote file date	false

Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn:
<https://www.linkedin.com/in/juliopari/>