
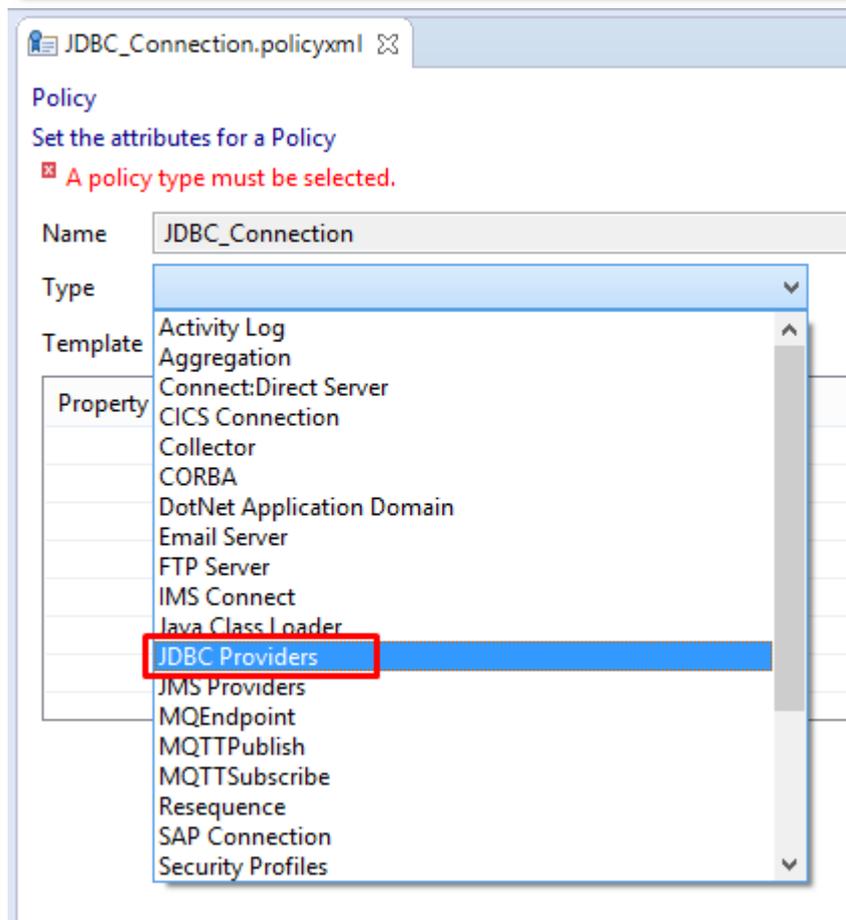


JDBC_Policy
(New...)

New Artifact
Create a new artifact.

-  [Policy](#)
-  [WS Policy Sets and Bindings](#)

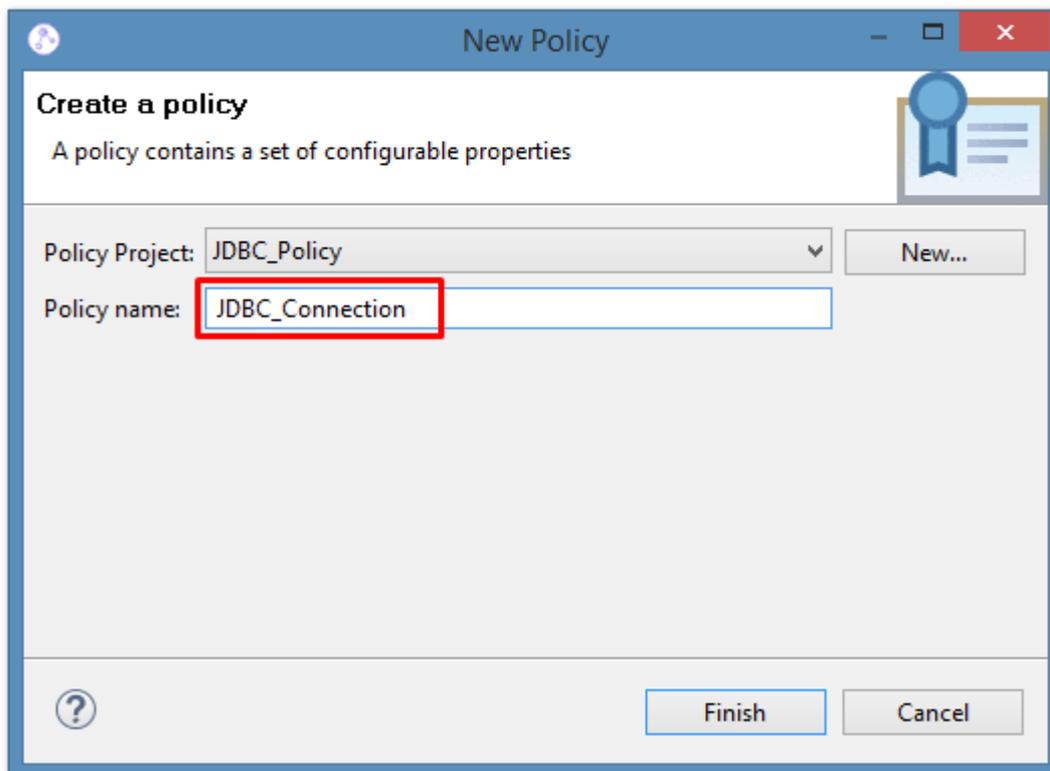

*JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

The property "Name of the database" requires a value to be specified.

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

| | | |
|------------------------------|---|---|
| Property | DB2_91_Windows | |
| Name of | DB2_91_Linux | |
| Type of | Oracle_Windows | |
| Version of | Oracle | |
| JDBC driv | Sybase_Windows | acleDriver |
| JDBC typ | Sybase | client.OracleXADataSource |
| Connecti | Microsoft SQL Server | in:[user]/[password]@[serverName]:[p... |
| Connecti | Informix_Windows | |
| Connecti | Informix | |
| Connecti | Informix_Windows_With_Date_Format_Windows | |
| Connecti | Informix_Windows_With_Date_Format | |
| Connecti | Teradata_Windows | |
| Connecti | Teradata | |
| Connecti | SolidDB_Windows | |
| Connecti | SolidDB | |
| Database | MySQL_57 | ase_Server_Name |
| Database server port number* | 1521 | |
| Type 4 driver class JARs URL | <ORACLE HOME>\jdbc\lib | |
| Name of the database schema | useProvidedSchemaNames | |
| Data source description | | |

JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

The property "Name of the database" requires a value to be specified.

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

| Property | Value |
|-------------------------------------|---|
| Name of the database* | EXAMPLE |
| Type of the database | Oracle |
| Version of the database | |
| JDBC driver class name* | oracle.jdbc.OracleDriver |
| JDBC type 4 data source class name* | oracle.jdbc.xa.client.OracleXADataSource |
| Connection URL format* | jdbc:oracle:thin:[user]/[password]@[serverName]:[p... |
| Connection URL format attribute 1 | <SID> |
| Connection URL format attribute 2 | |
| Connection URL format attribute 3 | |
| Connection URL format attribute 4 | |
| Connection URL format attribute 5 | |
| Database server name* | default_Database_Server_Name |
| Database server port number* | 1521 |
| Type 4 driver class JARs URL | <ORACLE HOME>\jdbc\lib |
| Name of the database schema | useProvidedSchemaNames |
| Data source description | |

Configuración JDBC

JDBC_Connection.policyxml

Policy

Set the attributes for a Policy

Name: JDBC_Connection

Type: JDBC Providers

Template: Oracle_Windows

| Property | Value |
|--|---|
| Name of the database* | EXAMPLE |
| Type of the database | Oracle |
| Version of the database | |
| JDBC driver class name* | oracle.jdbc.OracleDriver |
| JDBC type 4 data source class name* | oracle.jdbc.xa.client.OracleXADataSource |
| Connection URL format* | jdbc:oracle:thin:[user]/[password]@[serverName]:[p... |
| Connection URL format attribute 1 | <SID> |
| Connection URL format attribute 2 | |
| Connection URL format attribute 3 | |
| Connection URL format attribute 4 | |
| Connection URL format attribute 5 | |
| Database server name* | default_Database_Server_Name |
| Database server port number* | 1521 |
| Type 4 driver class JARs URL | <ORACLE HOME>\\jdbc\\lib |
| Name of the database schema | useProvidedSchemaNames |
| Data source description | |
| Maximum size of connection pool | 0 |
| Security identity (DSN) | default_User@default_Server |
| Environment parameters | |
| Supports XA coordinated transactions | true |
| Use JAR files that have been deployed in a .bar file | false |

Configuración CICS

CICS_Connetion.policyxml

Policy
Set the attributes for a Policy

Name CICS_Connetion

Type CICS Connection

Template CICS Connection

| Property | Value |
|---|--------|
| CICS server | |
| CICS Transaction Gateway URL | local: |
| CICS APPLID | |
| CICS APPLID qualifier | |
| Connection timeout (seconds) | 30 |
| Request timeout (seconds) | 120 |
| Security identity (DSN) | |
| Integration server used for XA recovery | |
| | |
| | |
| | |

Configuración FTP

FTP_Connection.policyxml

Policy
Set the attributes for a Policy

Name:

Type:

Template:

| Property | Value |
|----------------------------------|------------|
| FTP server name* | aprendeibm |
| Account information | |
| Remote FTP server directory | |
| FTP security identity | |
| Transfer mode | BINARY |
| Scan delay (seconds) | 60 |
| Connection type | PASSIVE |
| Strict host key checking | false |
| Encryption ciphers | |
| Compression level | 0 |
| Remote transfer protocol | FTP |
| Location of the known hosts file | |
| Message authentication code | |
| Timeout (seconds) | 0 |
| Preserve remote file date | false |

ArquitecturaIBM Consulting

