


Vamos a implementar en **API Connect 10** utilizando policy **Map** y **Invoke**

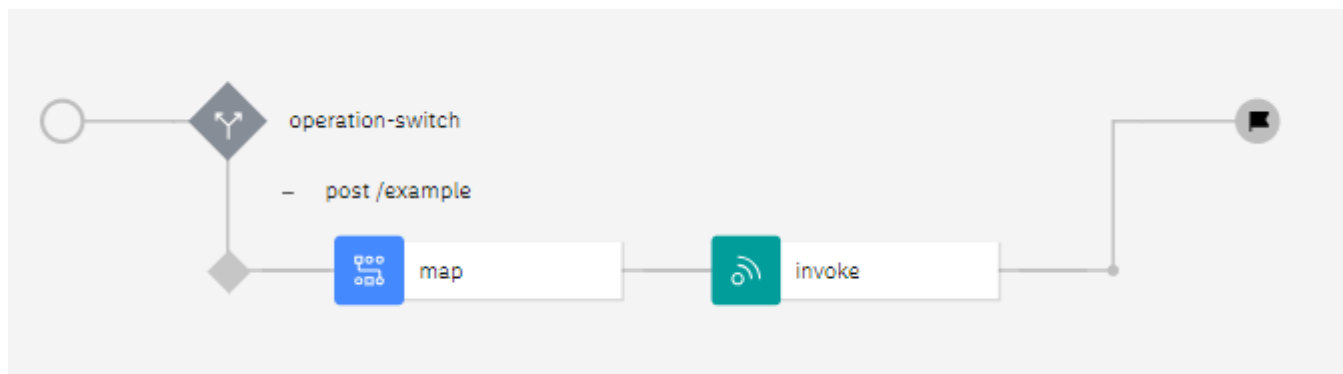

### Policy Map

Input	Map	Output
input string		output string

### Policy Map > Input

`request.headers.campoentrada`



map

Context variable	Name
request.headers.campoentrada	input
Content type	Definition *
none	string

### Policy Map > Output

message.headers.camposalida



map

Context variable	Name
message.headers.camposalida	output
Content type	Definition *
none	string

Source code - YAML: [api-example-request-header-backend-header\\_1.0.0.zip](#)

### Postman

Key	Value	Description
<input checked="" type="checkbox"/> Host	<calculated when request is sent>	
<input checked="" type="checkbox"/> User-Agent	PostmanRuntime/7.32.3	
<input checked="" type="checkbox"/> Accept	*/*	
<input checked="" type="checkbox"/> Accept-Encoding	gzip, deflate, br	
<input checked="" type="checkbox"/> Connection	keep-alive	
<input checked="" type="checkbox"/> campoentrada	123456	

---

Body Cookies (1) Headers (12) Test Results Status: 200 OK Time: 193 ms Size: 1.52 KB Save as Example

Pretty Raw Preview Visualize JSON 🔗 🔄

```

1  {
2    "args": {},
3    "headers": {
4      "x-forwarded-proto": "https",
5      "x-forwarded-port": "443",
6      "host": "postman-echo.com",
7      "x-amzn-trace-id": "Root=1-64a61611-5a093a3f070e286b5d35e597",
8      "cf-ray": "7e24018b0ee36dfb-LIM",
9      "cf-visitor": "{\"scheme\":\"https\"}",
10     "campoentrada": "123456",
11     "user-agent": "PostmanRuntime/7.32.3",
12     "accept": "*/*",
13     "postman-token": "5de264e9-edaf-426f-a0bb-d5deec8610c",
14     "cookie": "sails.sid=s%3AoZEsSvy-4rJrtB-DiDziiNwoBuYmHdej.06usdLQD3dWAWyFfL%2F2M69sXtoLgbuBlgjeyWI1JBA",
15     "cdn-loop": "cloudflare",
16     "cf-connecting-ip": "179.6.193.1",
17     "cf-ipcountry": "PE",
18     "x-envoy-external-address": "10.250.2.143",
19     "x-request-id": "6d119215-5623-4597-ac11-e9e8e14ae459",
20     "x-envoy-expected-rq-timeout-ms": "127000",
21     "x-request-start": "t=1688606225.202",
22     "x-client-ip": "179.6.193.1",
23     "x-global-transaction-id": "4c75ec1164a6161100011e23",
24     "camposalida": "123456",
25     "cache-control": "no-transform"
26   },
27   "url": "https://postman-echo.com/get"

```

## Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn:

<https://www.linkedin.com/in/juliopari/>