



request.body request
message.body prepare_request
message.body prepare_response
message.body response

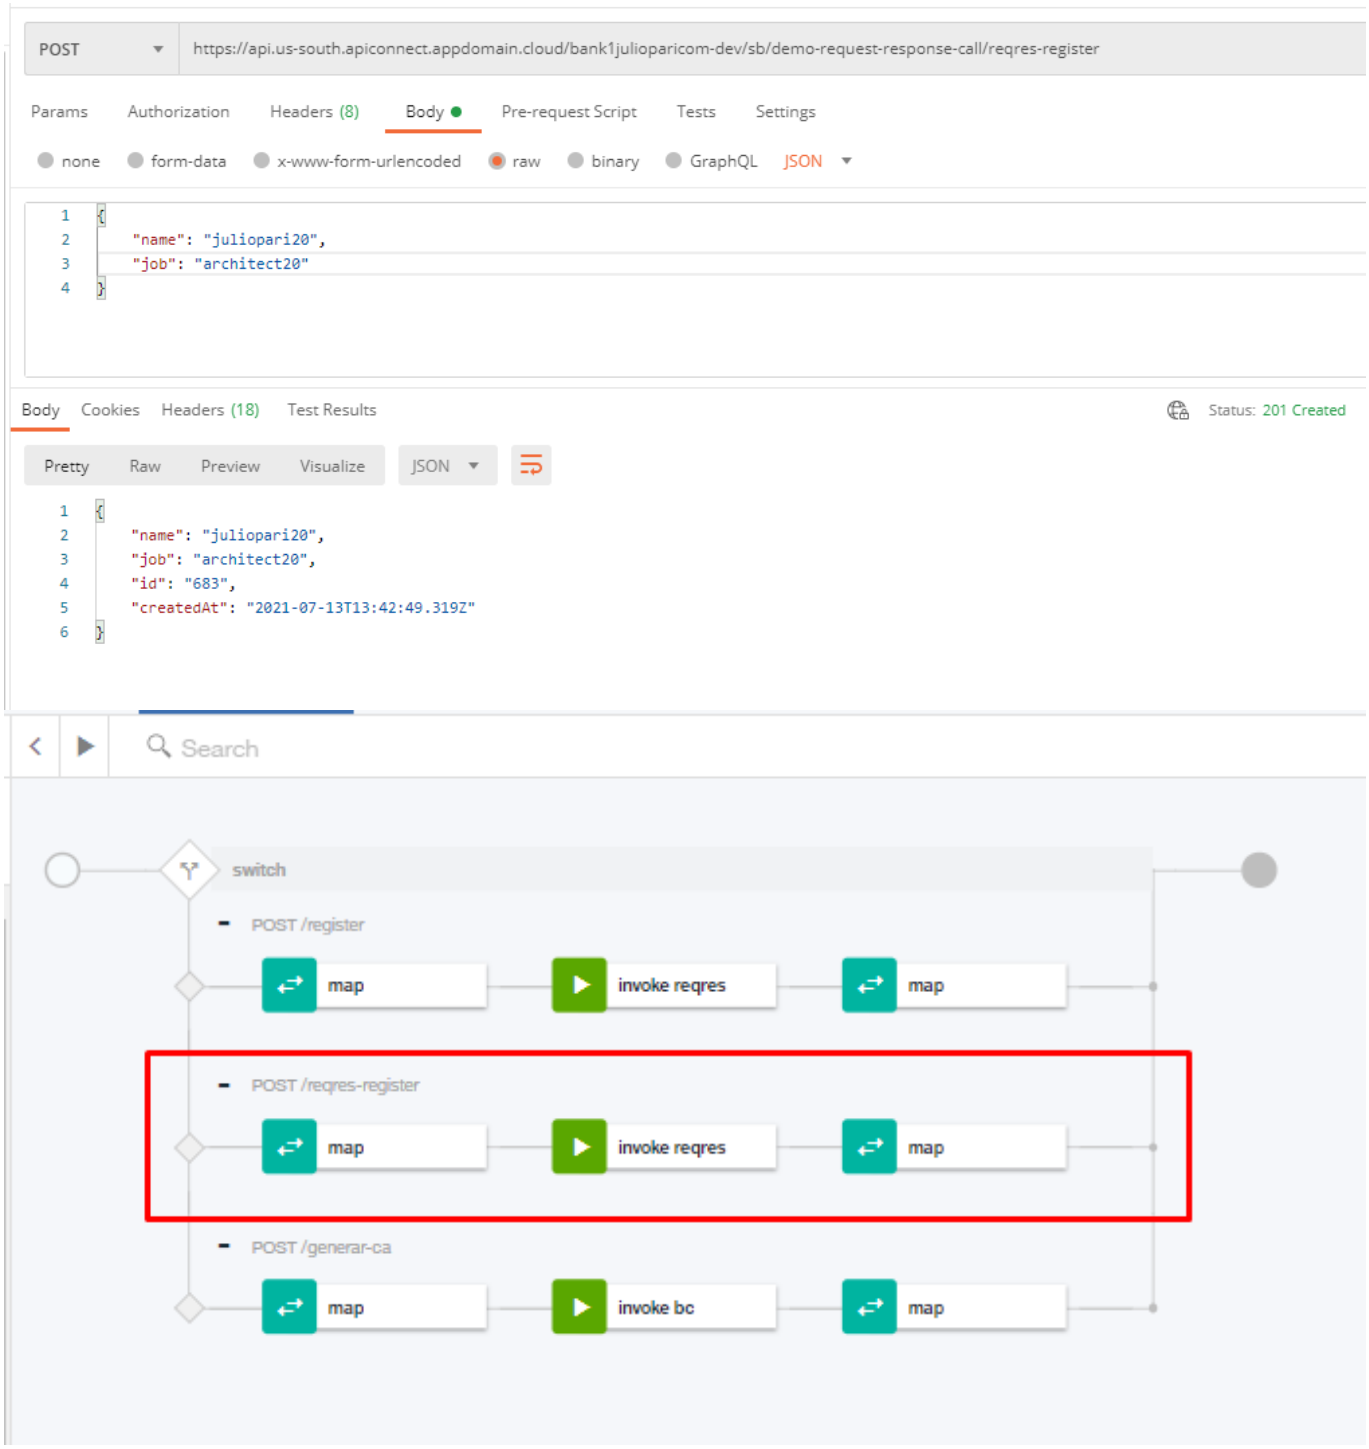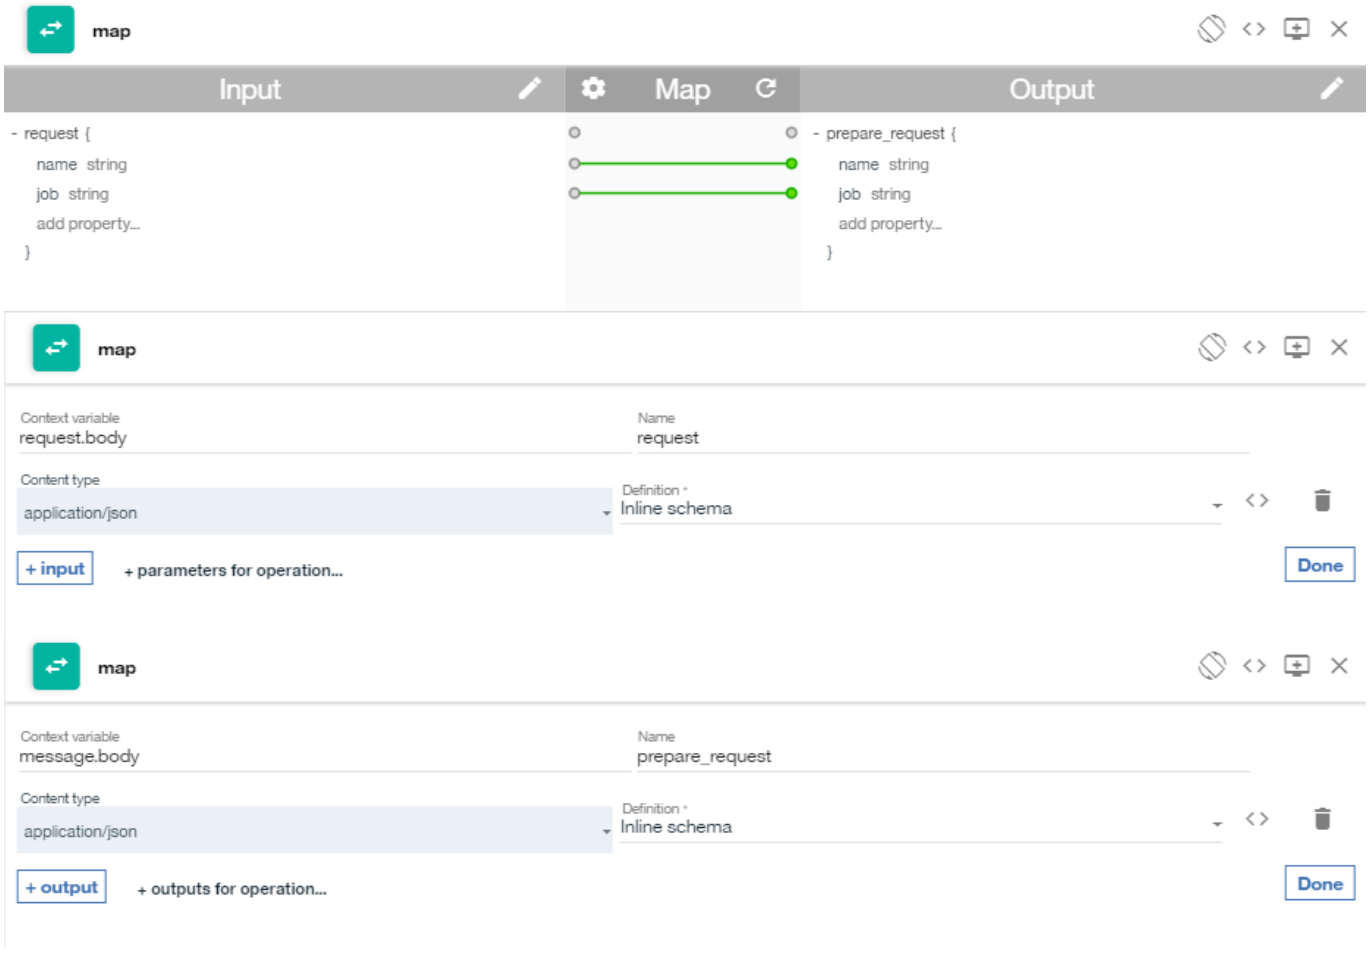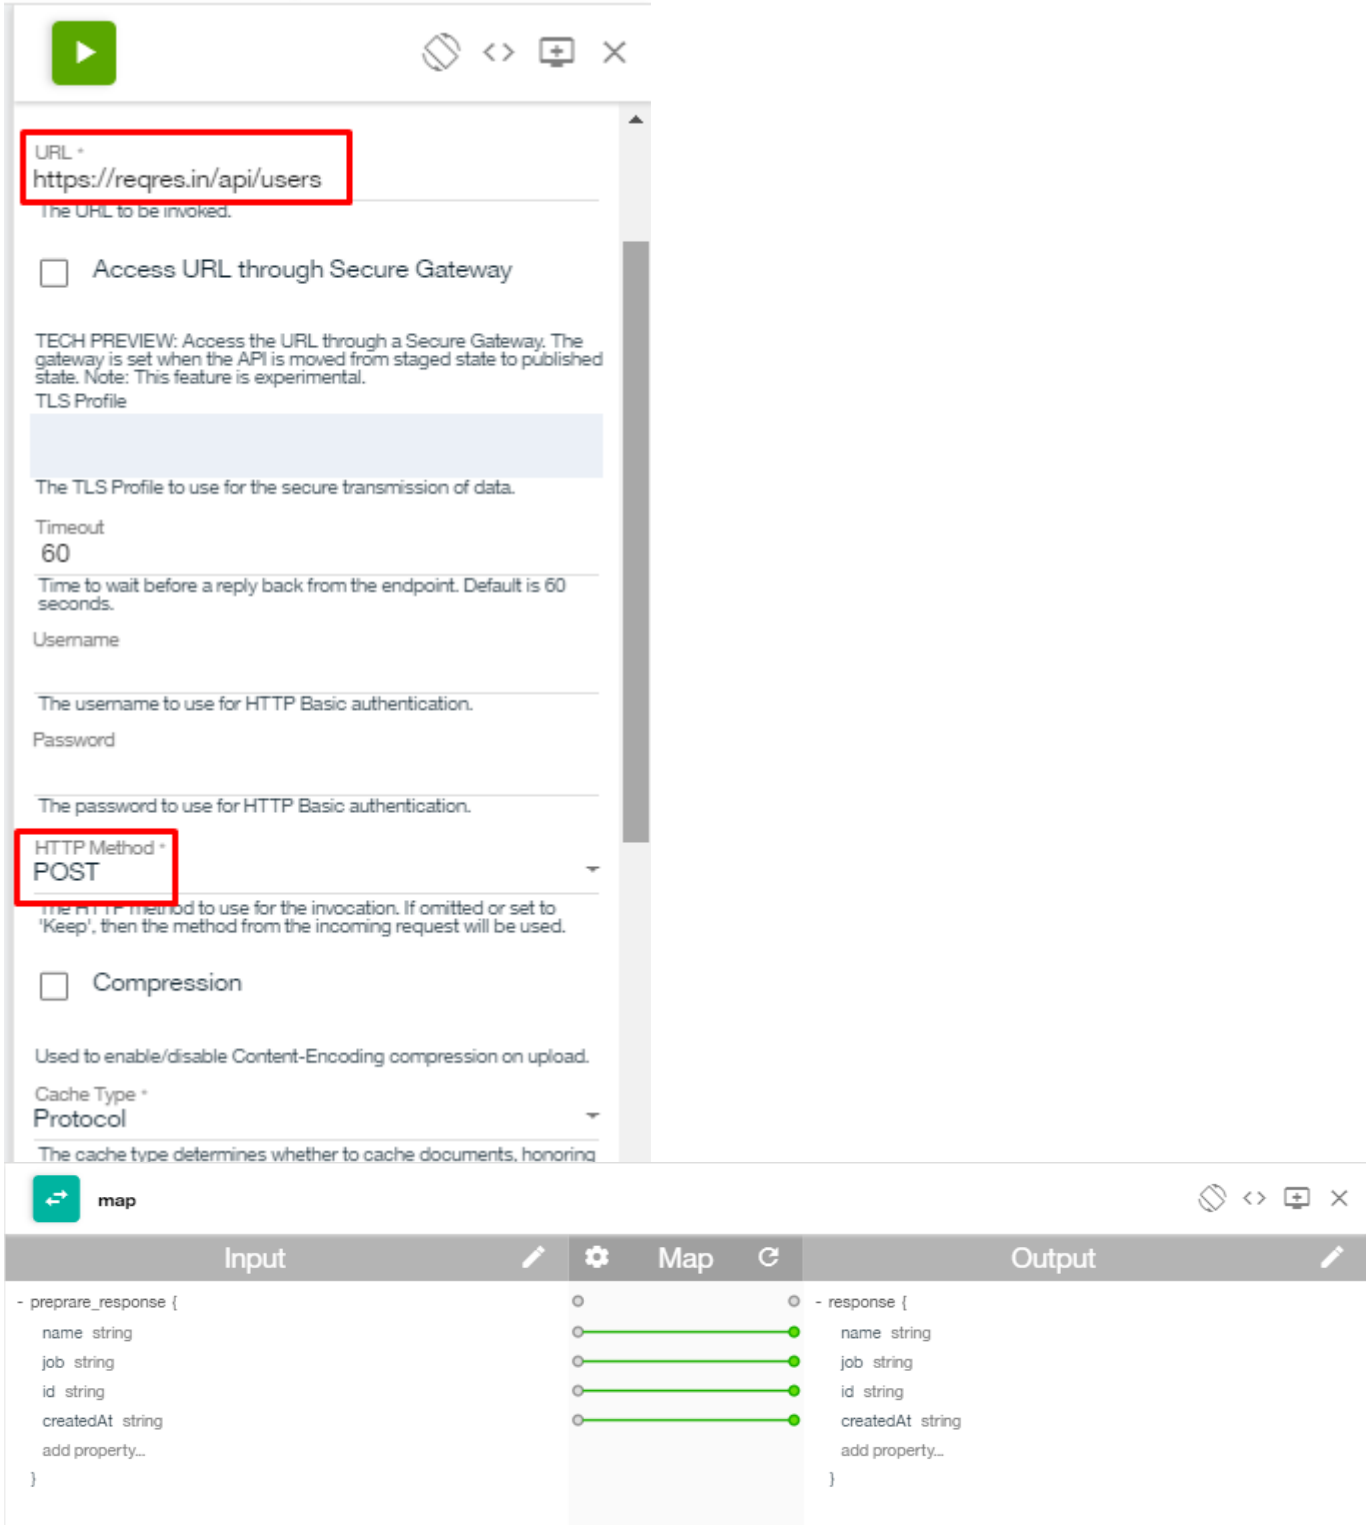


map
Input
Map
Output
- request {
name string
job string
add property...
}
- prepare_request {
name string
job string
add property...
}
map
Context variable
request.body
Name
request
Content type
application/json
Definition *
Inline schema
+ input
+ parameters for operation...
Done
map
Context variable
message.body
Name
prepare_request
Content type
application/json
Definition *
Inline schema
+ output
+ outputs for operation...
Done


URL *
https://reqres.in/api/users
The URL to be invoked.
Access URL through Secure Gateway
TECH PREVIEW: Access the URL through a Secure Gateway. The gateway is set when the API is moved from staged state to published state. Note: This feature is experimental.
TLS Profile
The TLS Profile to use for the secure transmission of data.
Timeout
60
Time to wait before a reply back from the endpoint. Default is 60 seconds.
Username
The username to use for HTTP Basic authentication.
Password
The password to use for HTTP Basic authentication.
HTTP Method *
POST
'Keep', then the method from the incoming request will be used.
Compression
Used to enable/disable Content-Encoding compression on upload.
Cache Type *
Protocol
map
Input
Map
Output
- preprare_response {
name string
job string
id string
createdAt string
add property...
}
- response {
name string
job string
id string
createdAt string
add property...
}

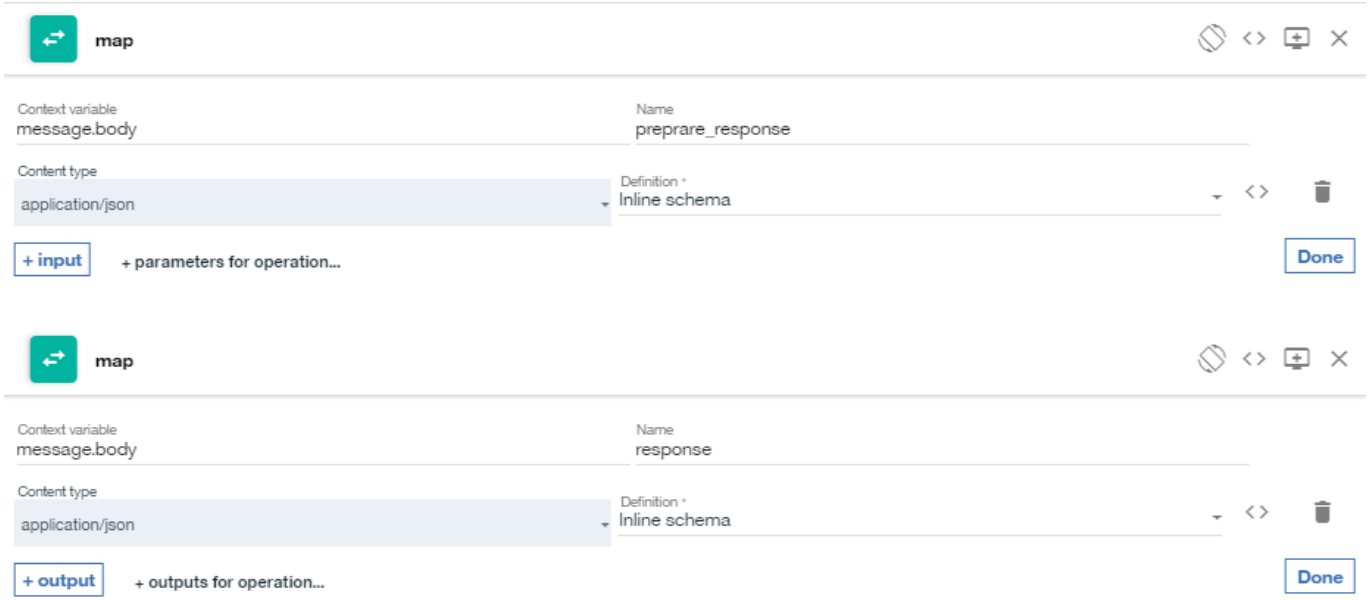

ArquitecturaIBM Consulting

