



Se requiere ofuscar un campo del «response_body» pero solo a nivel de **logs analíticas**, no a nivel de la variable de contexto «message.body»

Pantalla: Analíticas

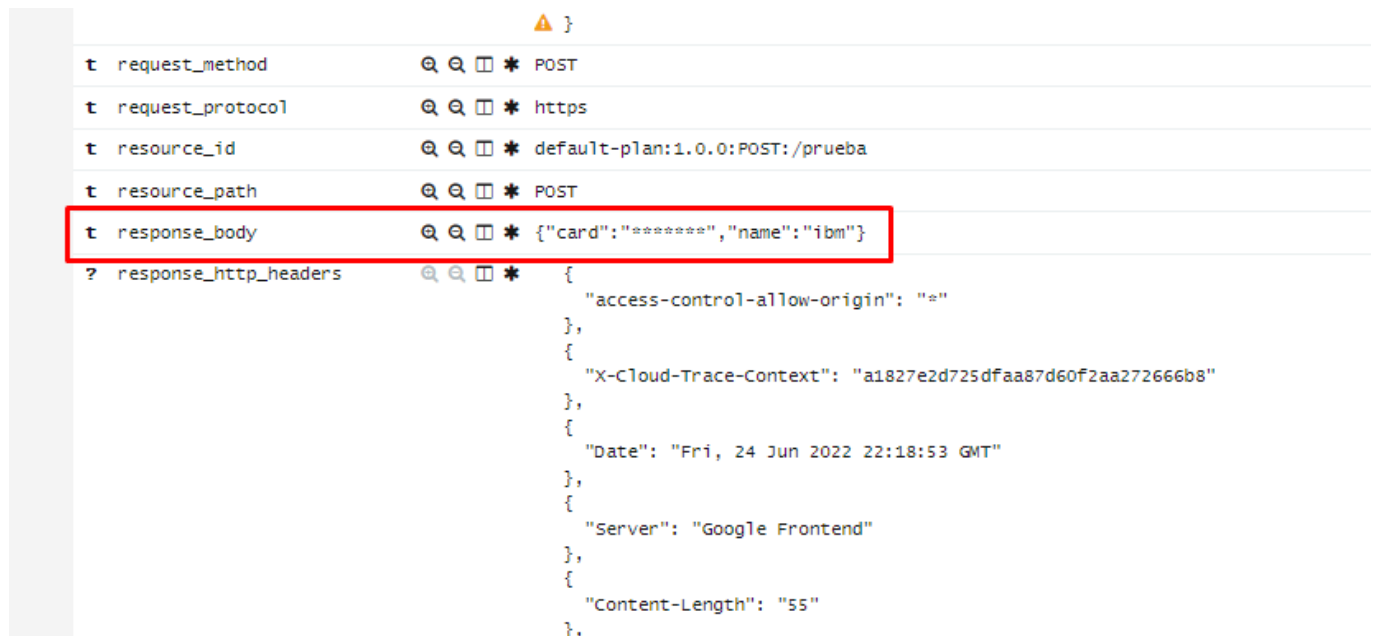


Pantalla: Postman

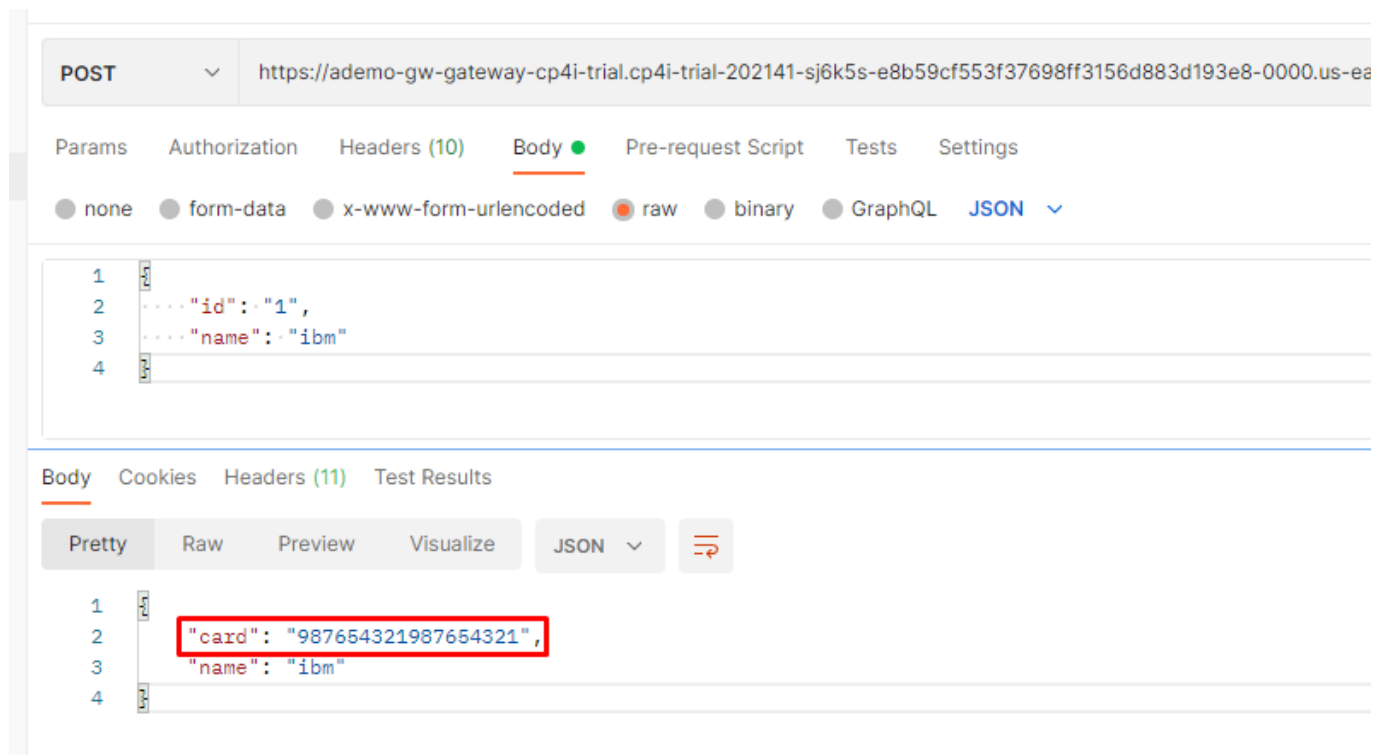

Solución

_1. Flow

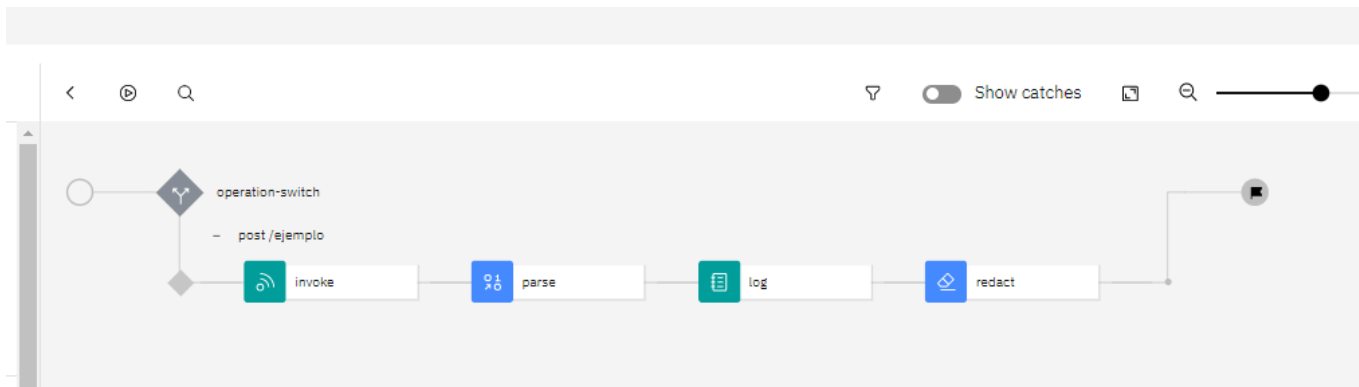

_2. Policy Log

The screenshot shows the configuration for the 'log' policy. The 'log' node in the flow is highlighted with a red box. The configuration window is also highlighted with a red border and contains the following details:

- Title: log
- Description: (empty text area)
- Mode *: Gather-only (indicated by a blue arrow)
- Log Level: default

_3. Policy Redact



4. Activar Activity Log a nivel de API

The screenshot displays the IBM API Connect v10 Gateway configuration interface. The left sidebar shows a tree view of settings, with 'Activity Log' highlighted under 'Gateway and portal settings'. The main panel shows the 'Activity Log' configuration page, which is currently set to 'Enabled'. Below this, there are sections for 'Success Content (optional)' and 'Error Content (optional)', both of which are set to 'payload'. A 'Preserved request header' section is also visible at the bottom.

Documentación IBM

- <https://www.ibm.com/docs/en/api-connect/10.0.x?topic=policies-redaction-datapower-api-gateway>

Adjunto YAML example

- Yaml: [juliopari-log-ofuscacion-v10-api_1.0.0.zip](#)

Nota

- Esta api invoca a una api mock, tipo post que siempre retorna
- {
 «card»: «987654321987654321»,
 «name»: «ibm»
}

Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn:
<https://www.linkedin.com/in/juliopari/>
