



Se requiere ofuscar un campo del «**response_body**» pero solo a nivel de **logs analíticas**, no a nivel de la variable de contexto «**message.body**»

Pantalla: Analíticas

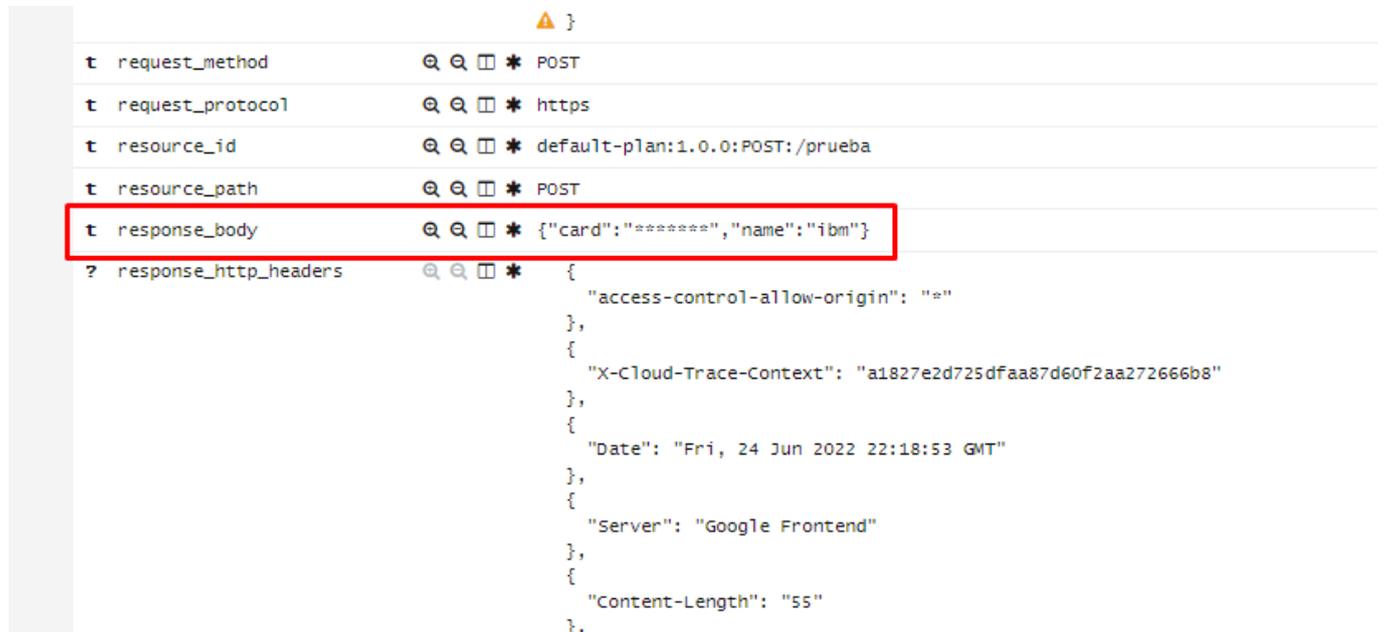


Pantalla: Postman

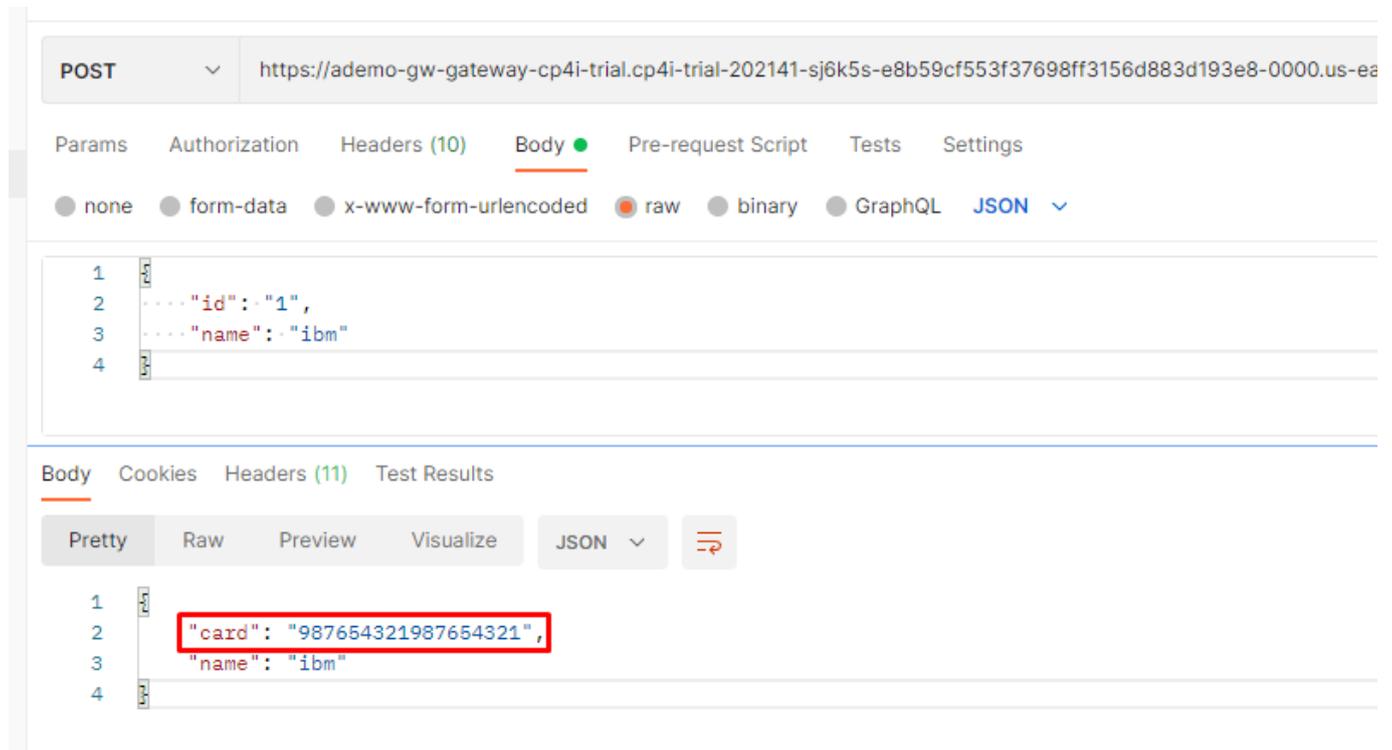

Solución

_1. Flow

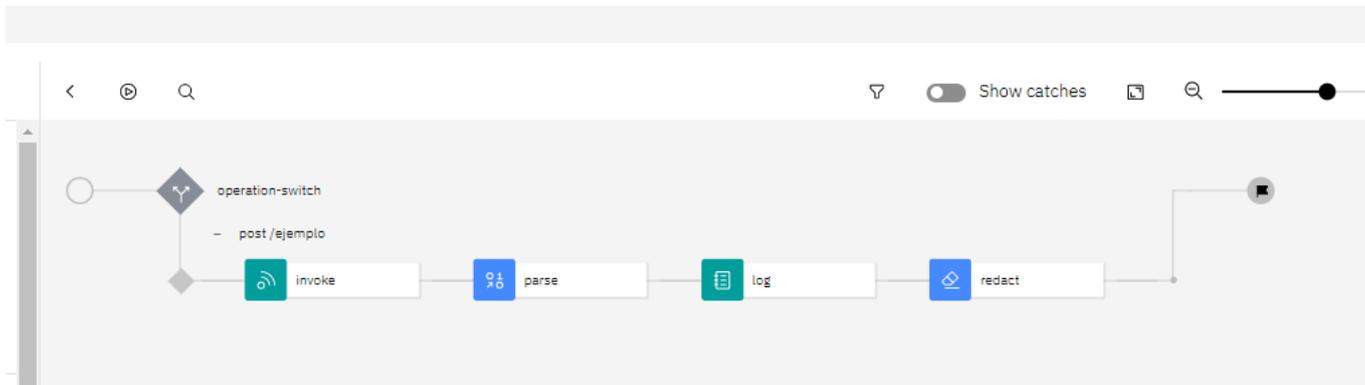

_2. Policy Log

The screenshot shows the configuration for the 'log' policy. The 'log' node in the flow is highlighted with a red box. The configuration window is also highlighted with a red border. The 'log' node is highlighted with a blue border. The configuration window shows the following fields:

- Title: log
- Description: (empty)
- Mode: Gather-only (highlighted with a blue box and a blue arrow pointing to it)
- Log Level: default

_3. Policy Redact



_4. Activar Activity Log a nivel de API

The screenshot displays the IBM API Connect v10 Gateway configuration interface. The left sidebar shows a navigation menu with 'Activity Log' highlighted. The main content area shows the 'Activity Log' configuration page. The 'Enabled' checkbox is checked. The 'Success Content (optional)' and 'Error Content (optional)' fields are both set to 'payload'. The 'Preserved request header' field is empty.

Documentación IBM

- <https://www.ibm.com/docs/en/api-connect/10.0.x?topic=policies-redaction-data-power-api-gateway>

Adjunto YAML example

- Yaml: [juliopari-log-ofuscacion-v10-api_1.0.0.zip](#)

Nota

- Esta api invoca a una api mock, tipo post que siempre retorna
- ```
{
 «card»: «987654321987654321»,
 «name»: «ibm»
}
```

## ArquitecturaIBM Consulting

