




Intento 1: Iniciar sesión con usuario root y ejecutar el .jar de Oracle SOA Suite 12c. Aquí tendremos un problema ya que nos salta un error [«The current user is root or has superuser privilege»], esto se debe a:

El instalador de Oracle requiere que se realicen ciertas acciones con privilegios de administrador, pero no se debe invocar directamente como usuario root. En su lugar, ejecuta el instalador utilizando un usuario normal y sin privilegios, y el instalador le solicita que ejecute ciertas acciones como root en otra sesión, según sea necesario.


Una práctica común es crear un usuario y grupo de shell específicamente para la instalación de Oracle. Eso también tiene la ventaja de mantener cosas como las configuraciones de entorno locales para un solo usuario.

En mi caso tengo 2 usuarios: jupari (usuario normal) y root (el de linux)


Intento 2: Iniciar con usuario normal (jupari) e ir a la carpeta donde están los instaladores .jar y ejecutarlos de la siguiente manera

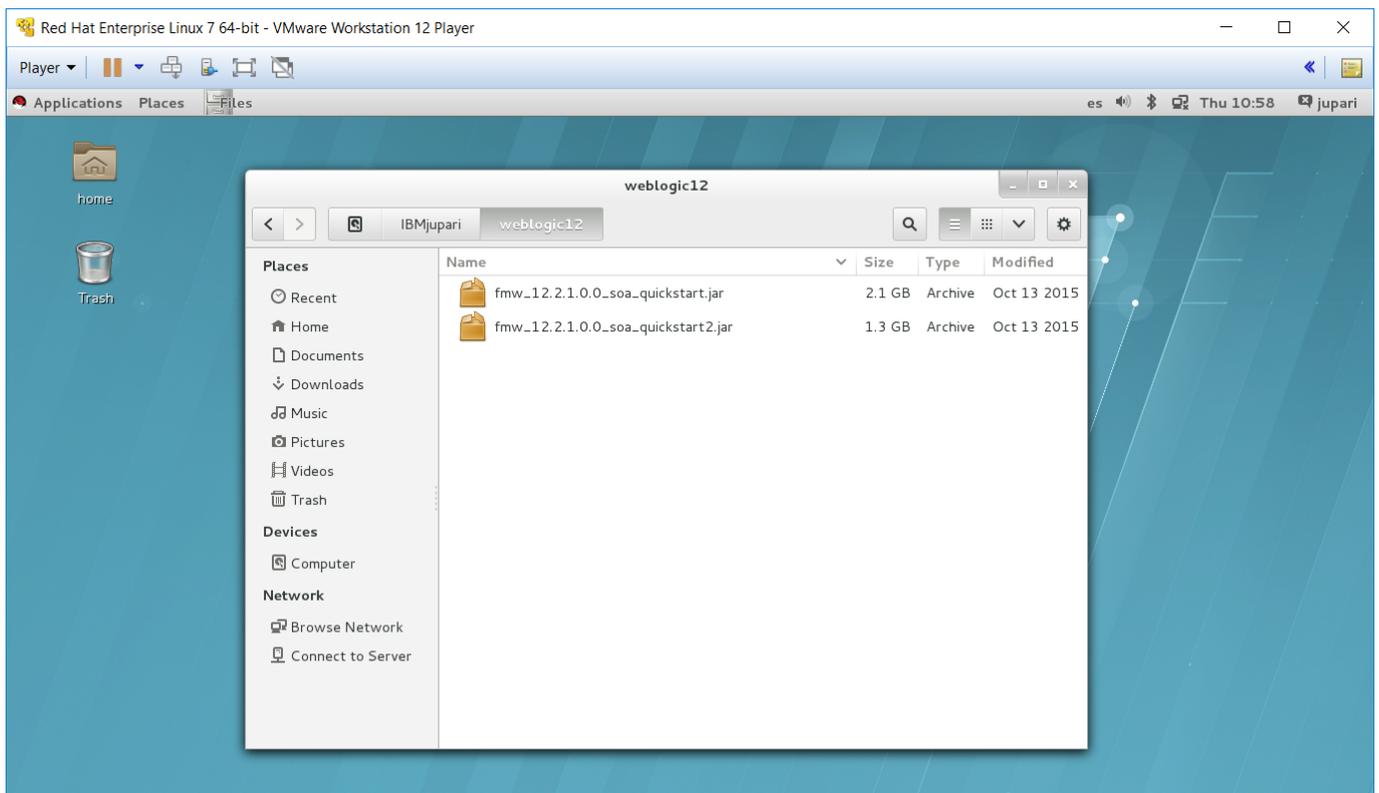



```
[jupari@localhost weblogic12]$ /usr/bin/java -jar fmw_12.2.1.0.0_soa_quickstart.jar
```

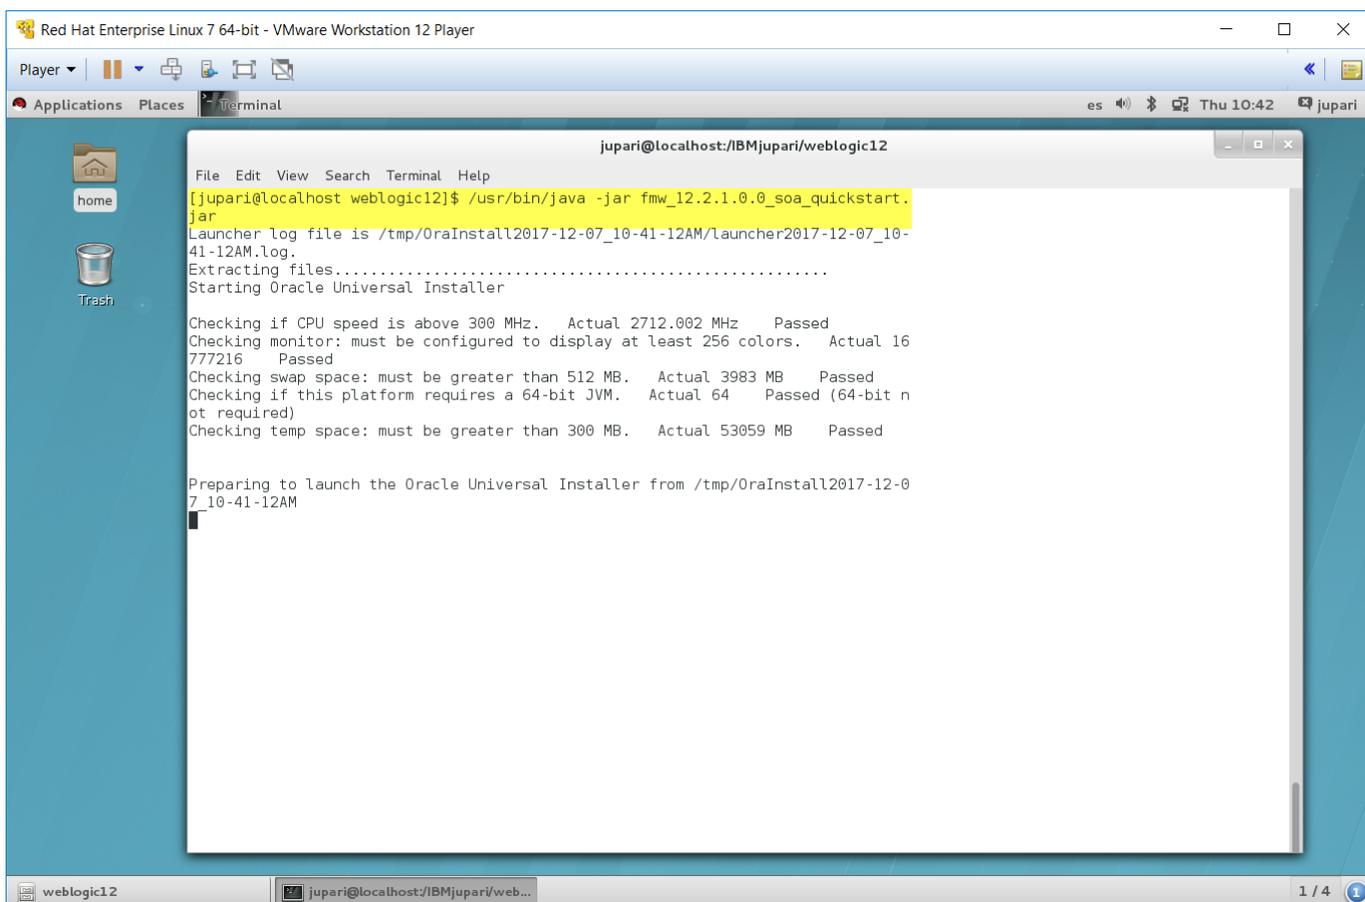





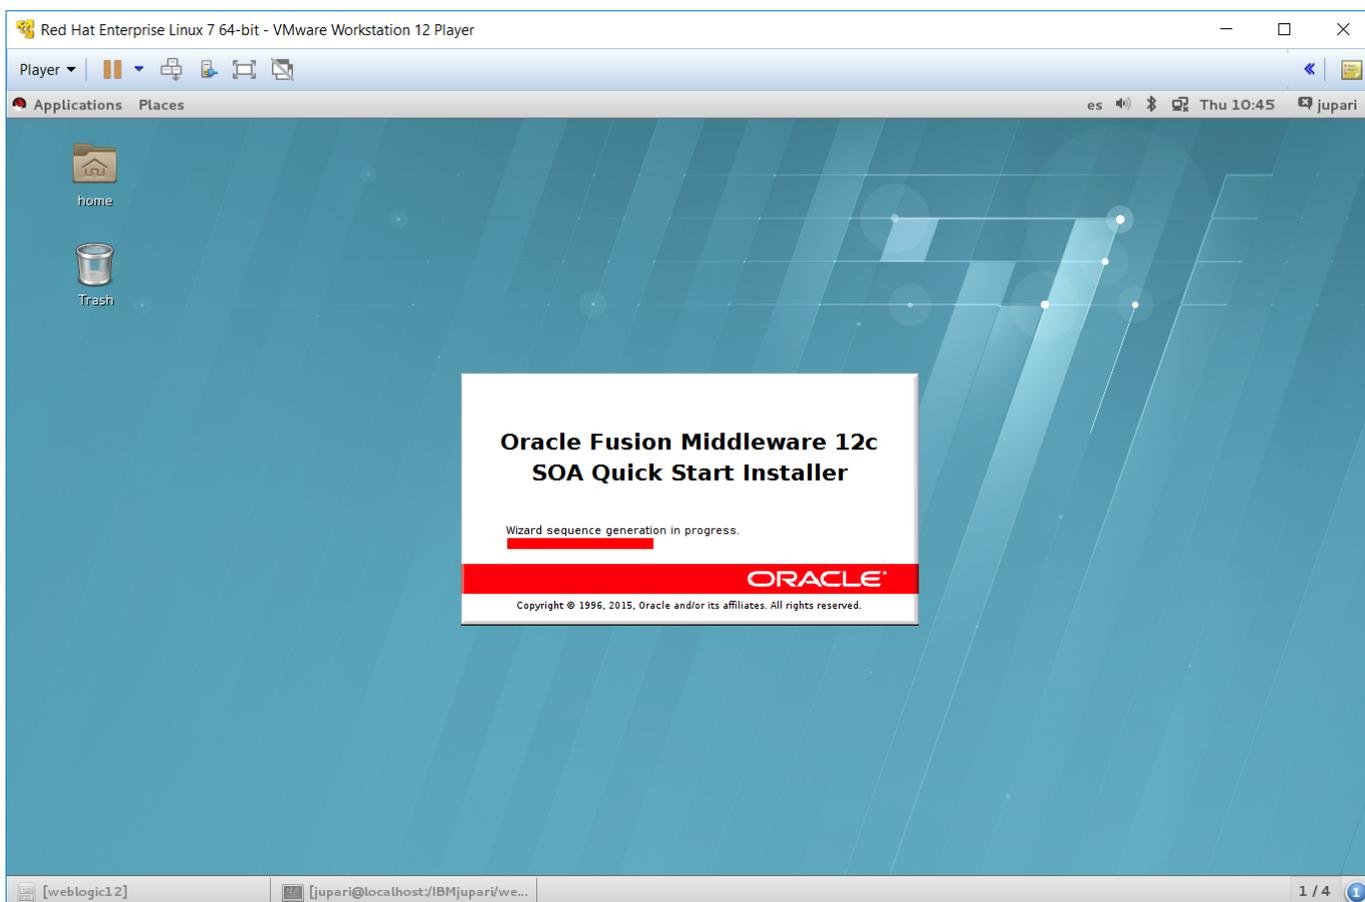


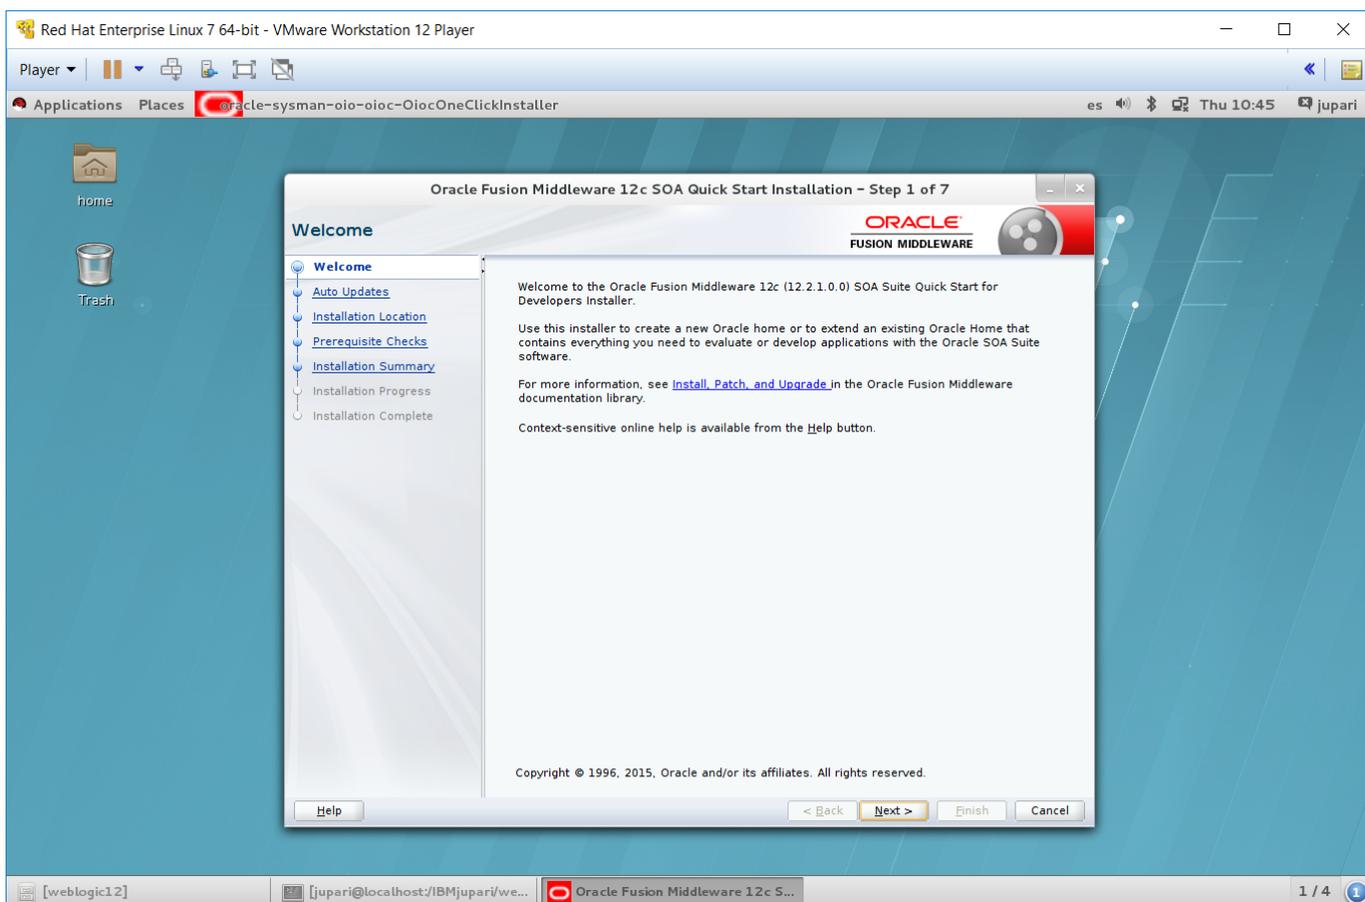

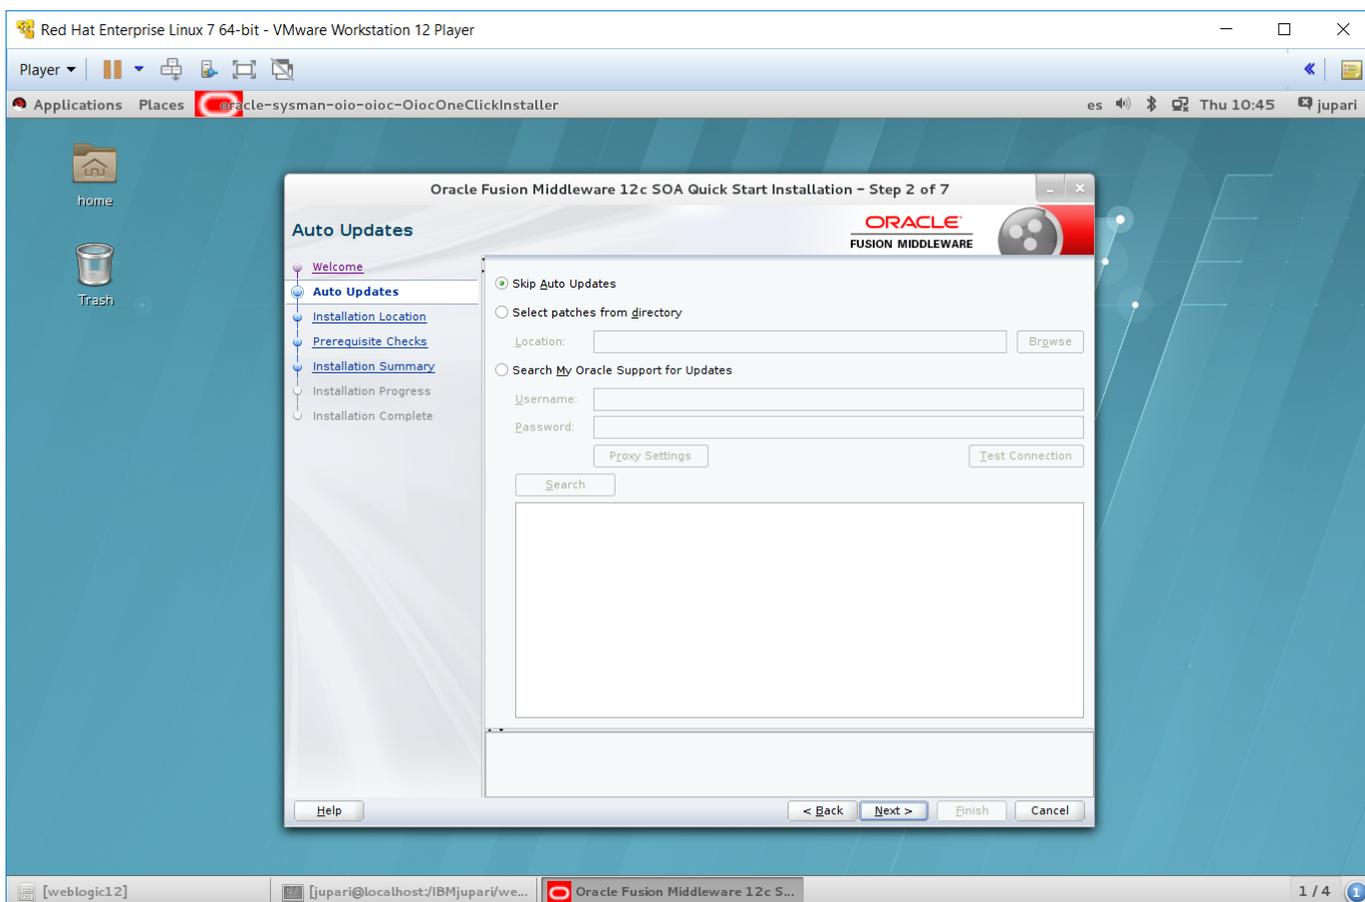


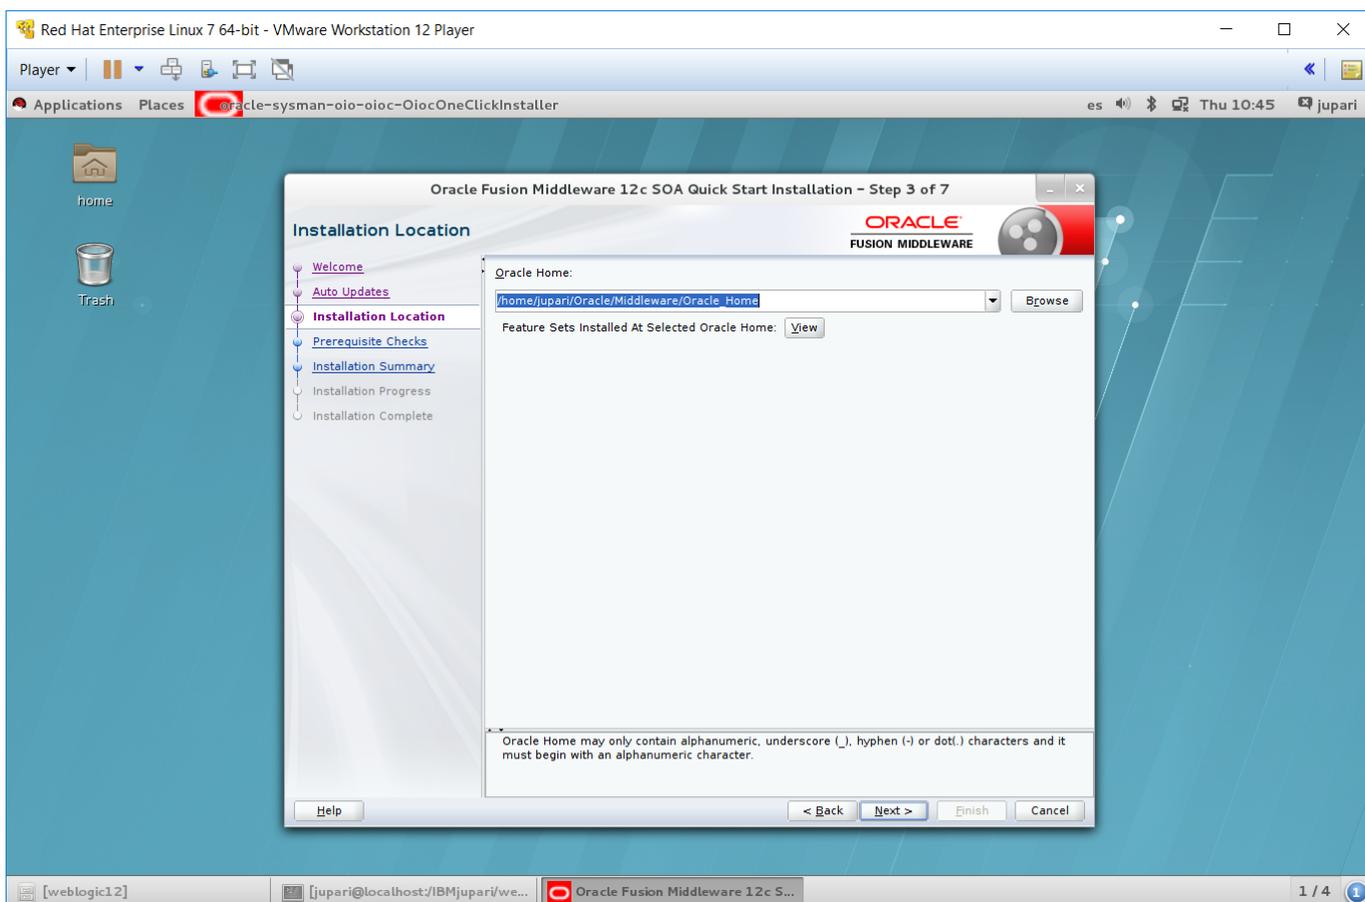

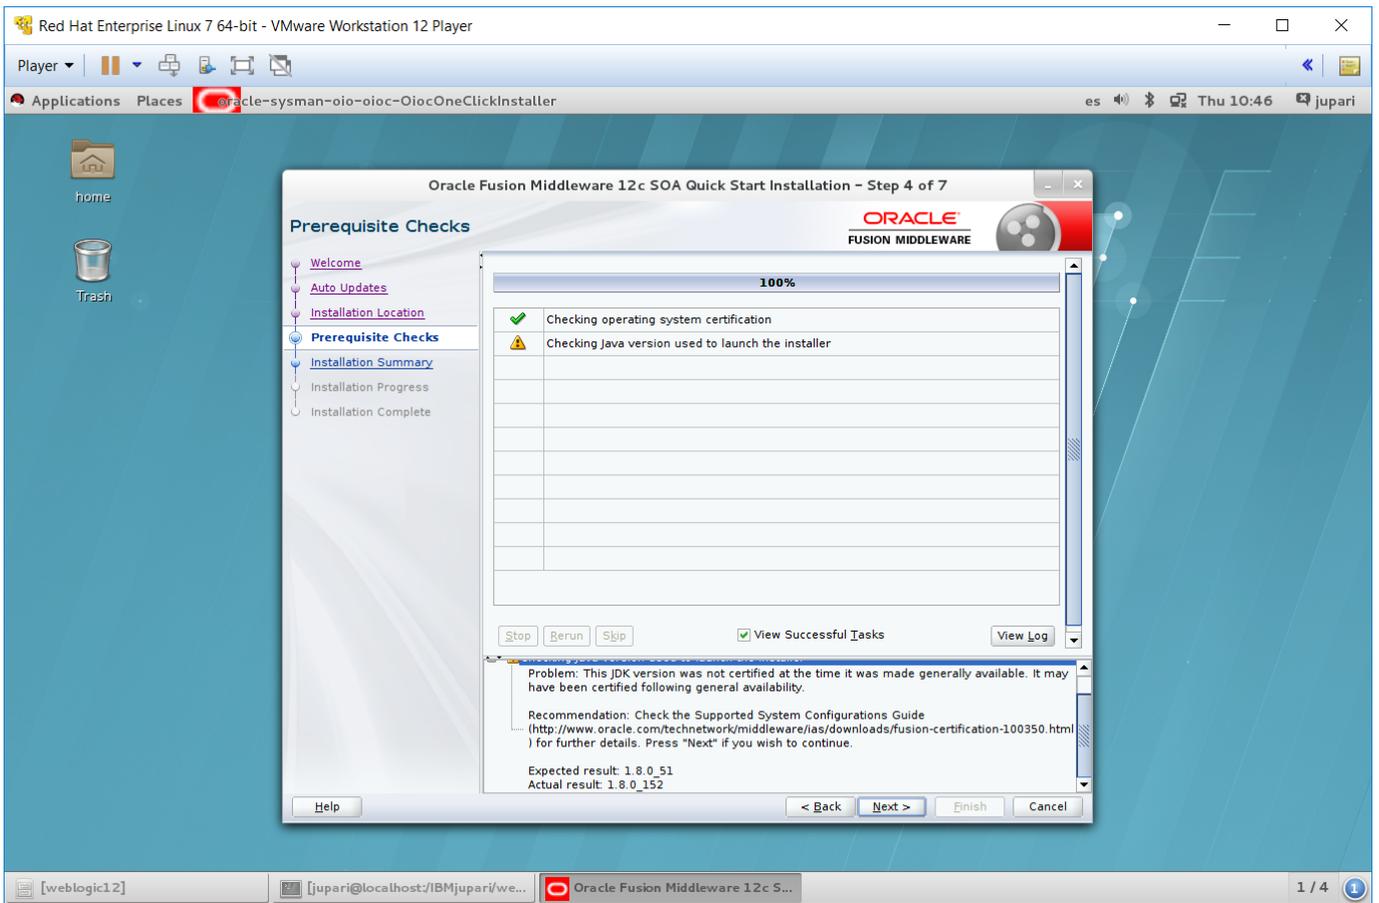


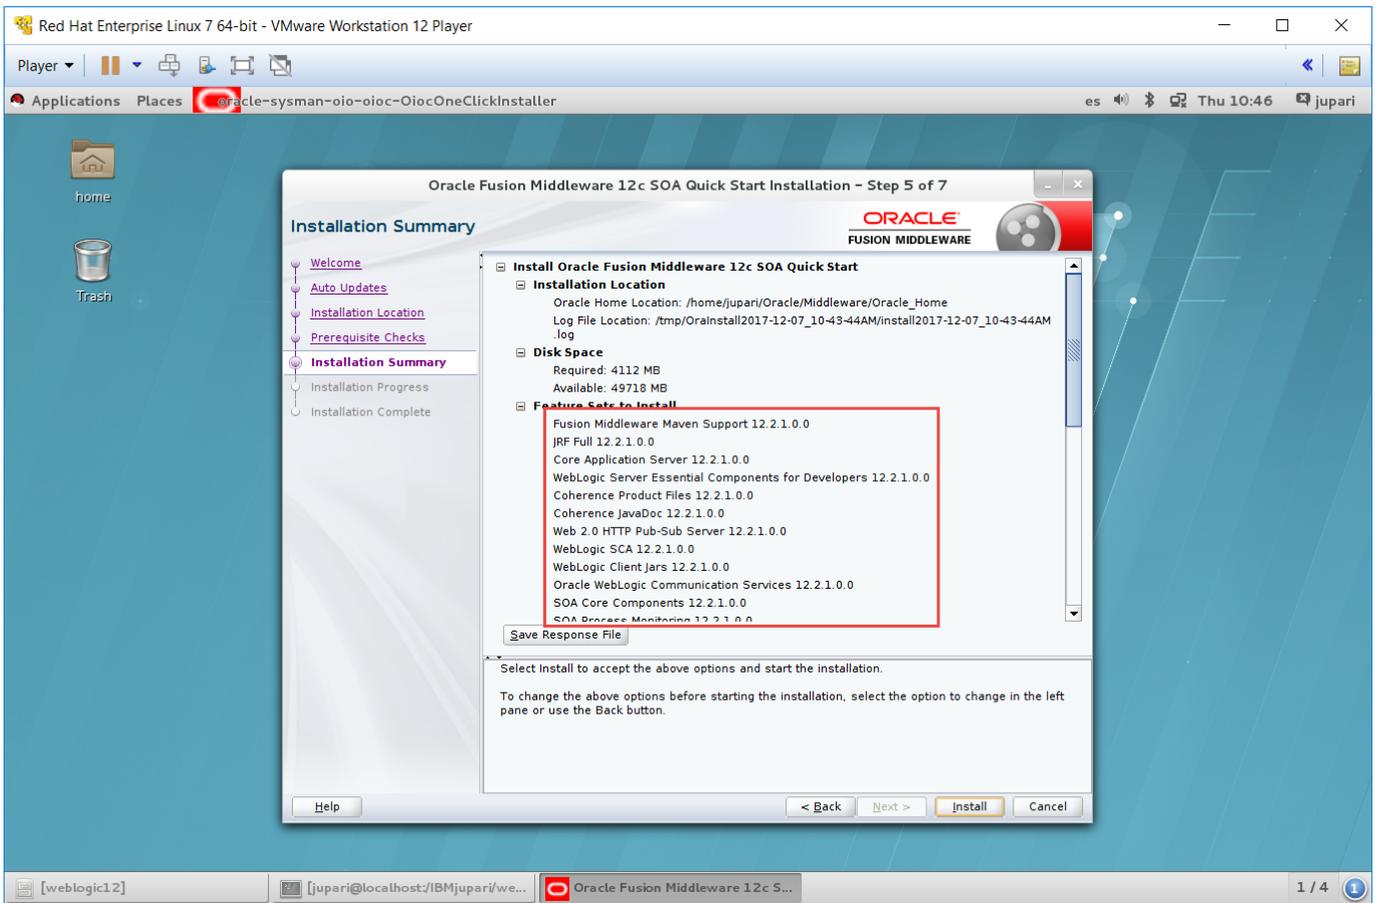



Instalación de Oracle Fusion Middleware 12c SOA en Red Hat Enterprise Linux 7 64-bit | 11

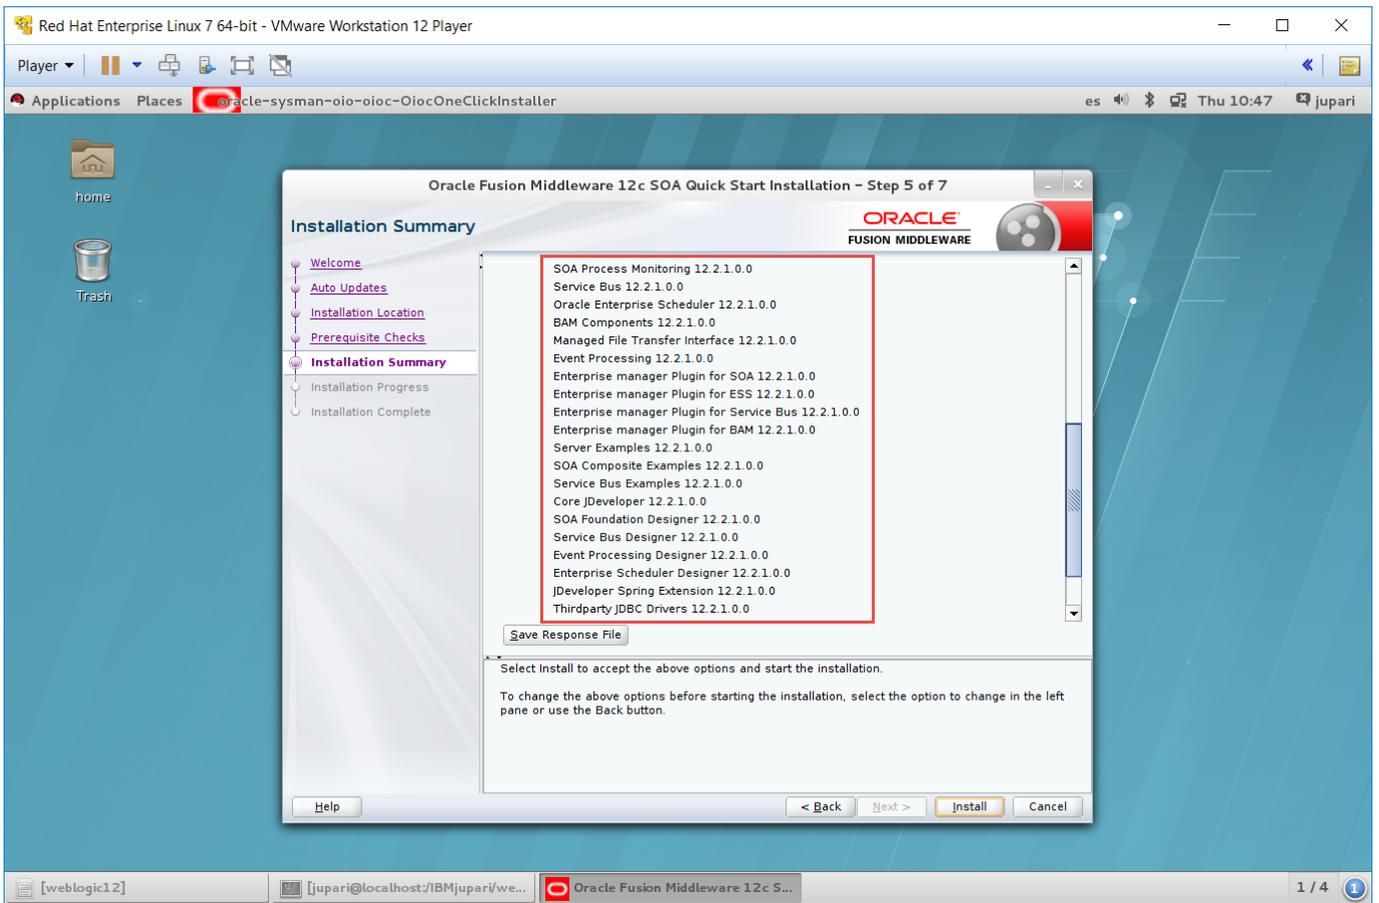

Instalación de Oracle Fusion Middleware 12c SOA en Red Hat Enterprise Linux 7 64-bit | 12

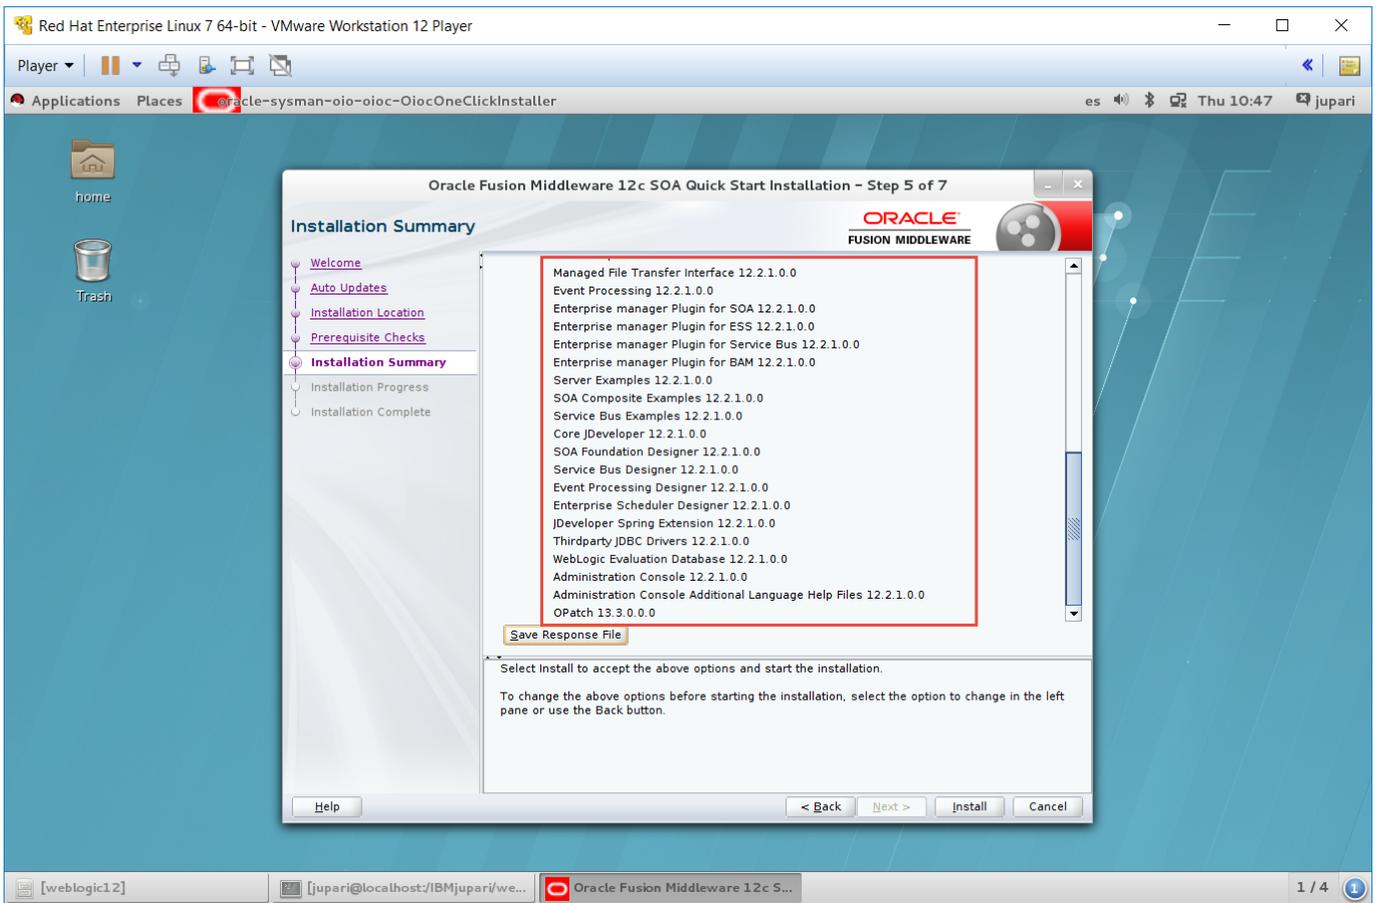

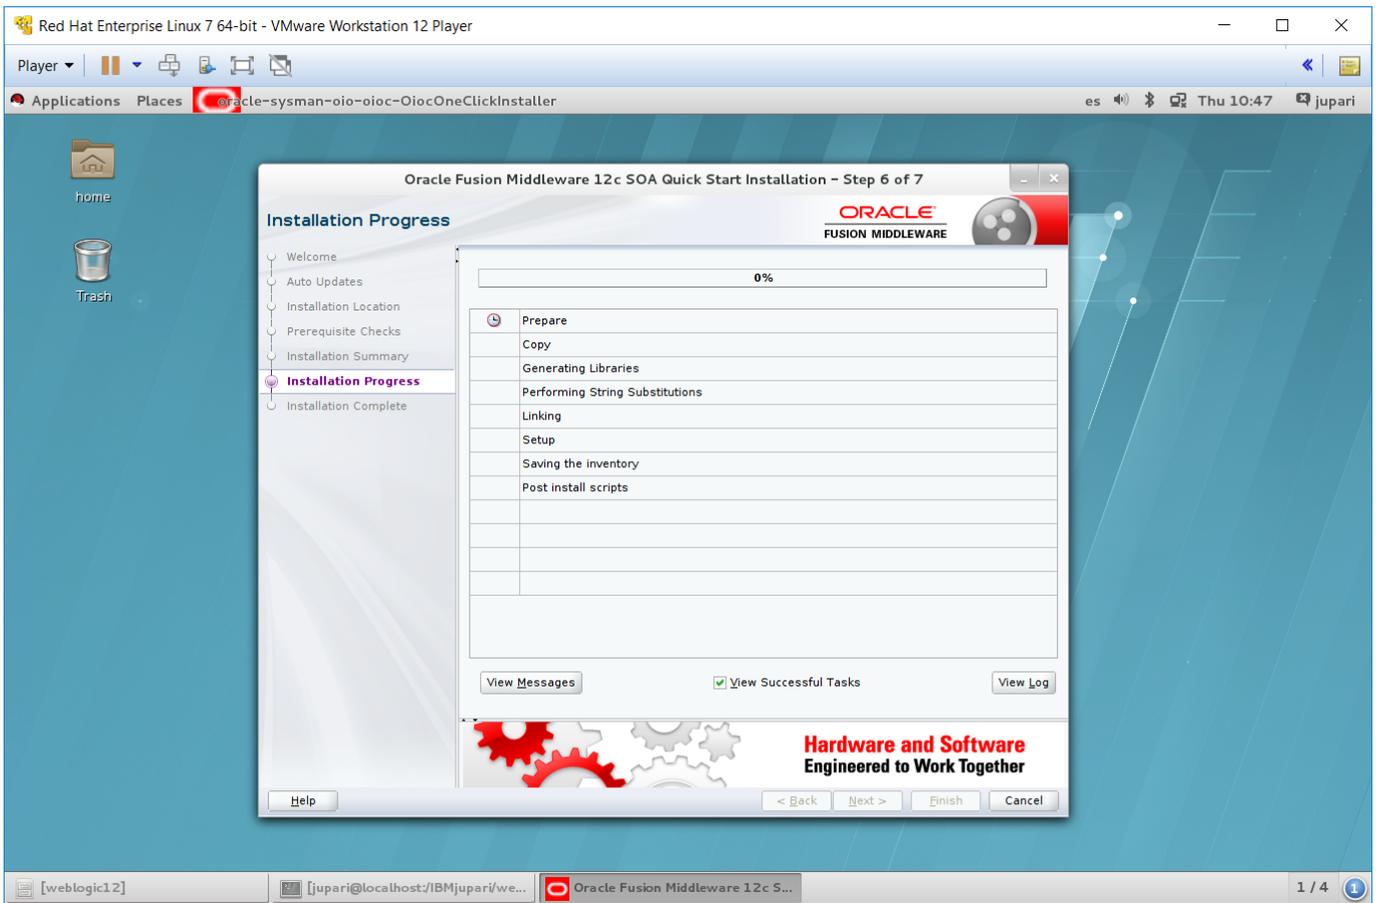

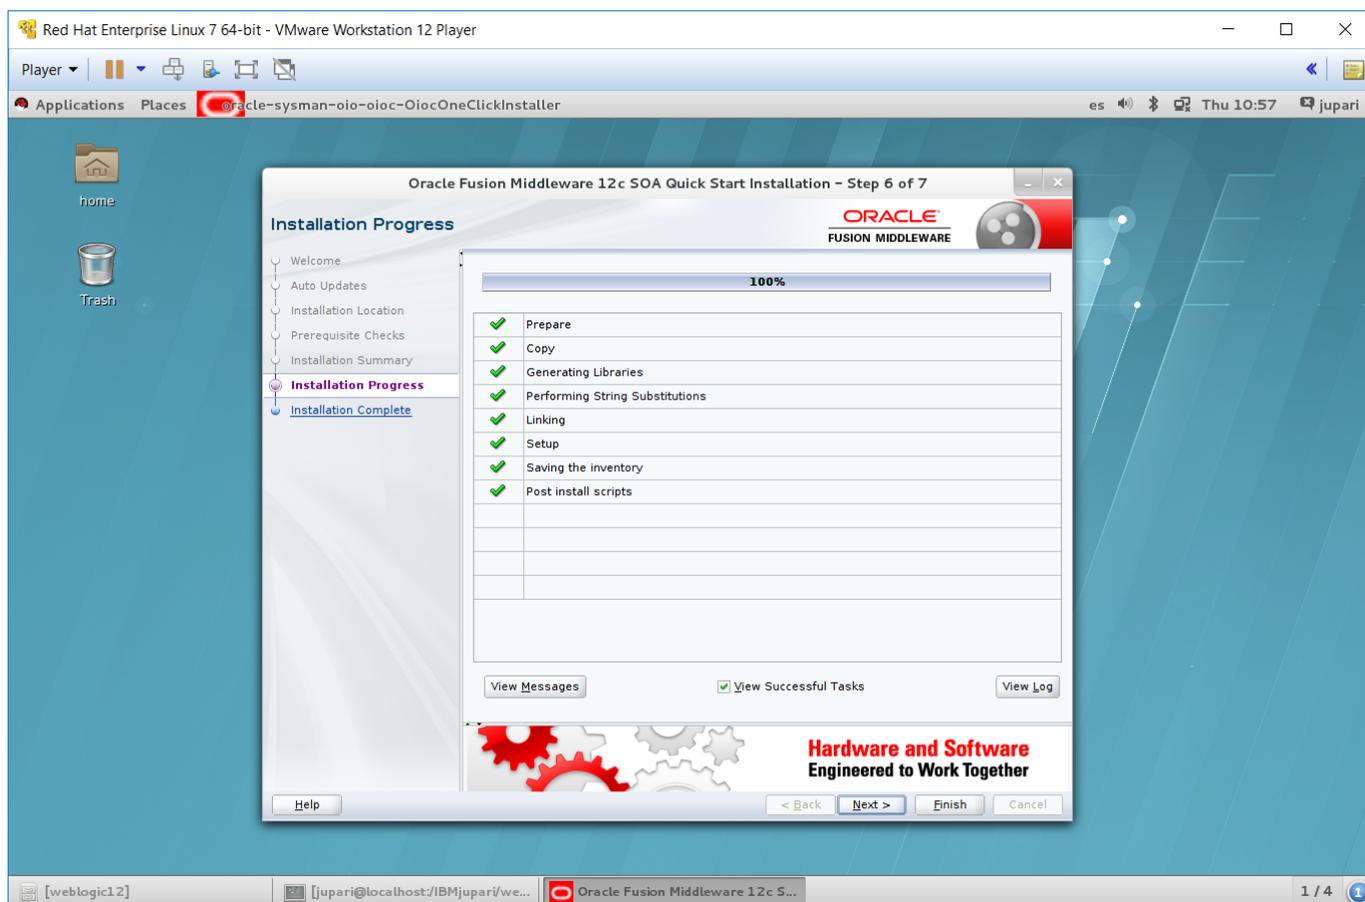


Ejecutar JDeveloper

```
/home/jupari/Oracle/Middleware/Oracle_Home/jdeveloper/jdev/bin  
./jdev
```

```
# ó #
```


```
/home/jupari/Oracle/Middleware/Oracle_Home/jdeveloper/jdev/bin/jdev
```

Iniciando WebLogic desde JDeveloper

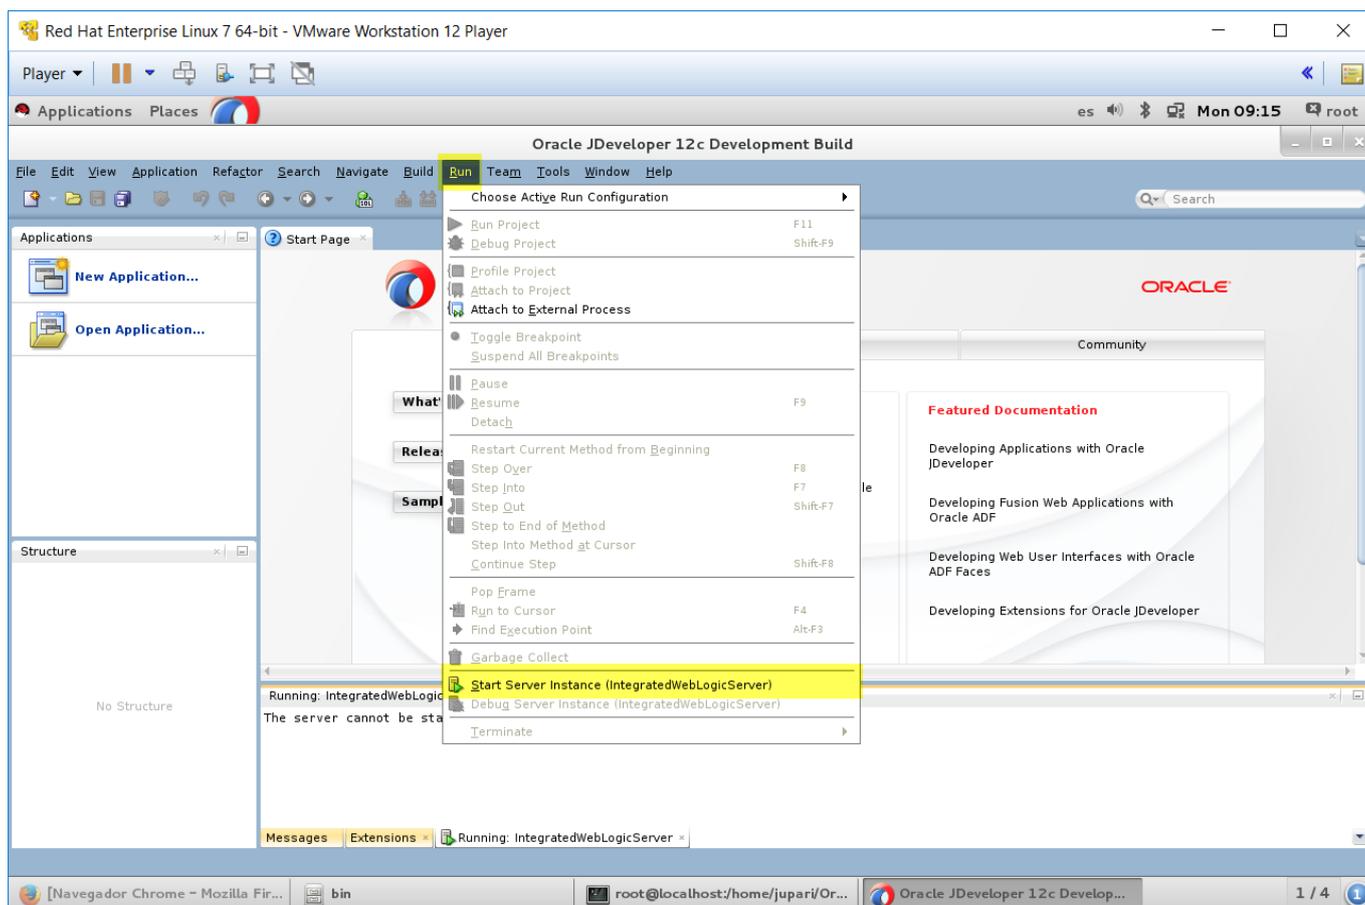



Creamos la credencial

- Administrador ID: weblogic
- Password: weblogic123
- Listen Port: 7101
- SSL Listen Port: 7102

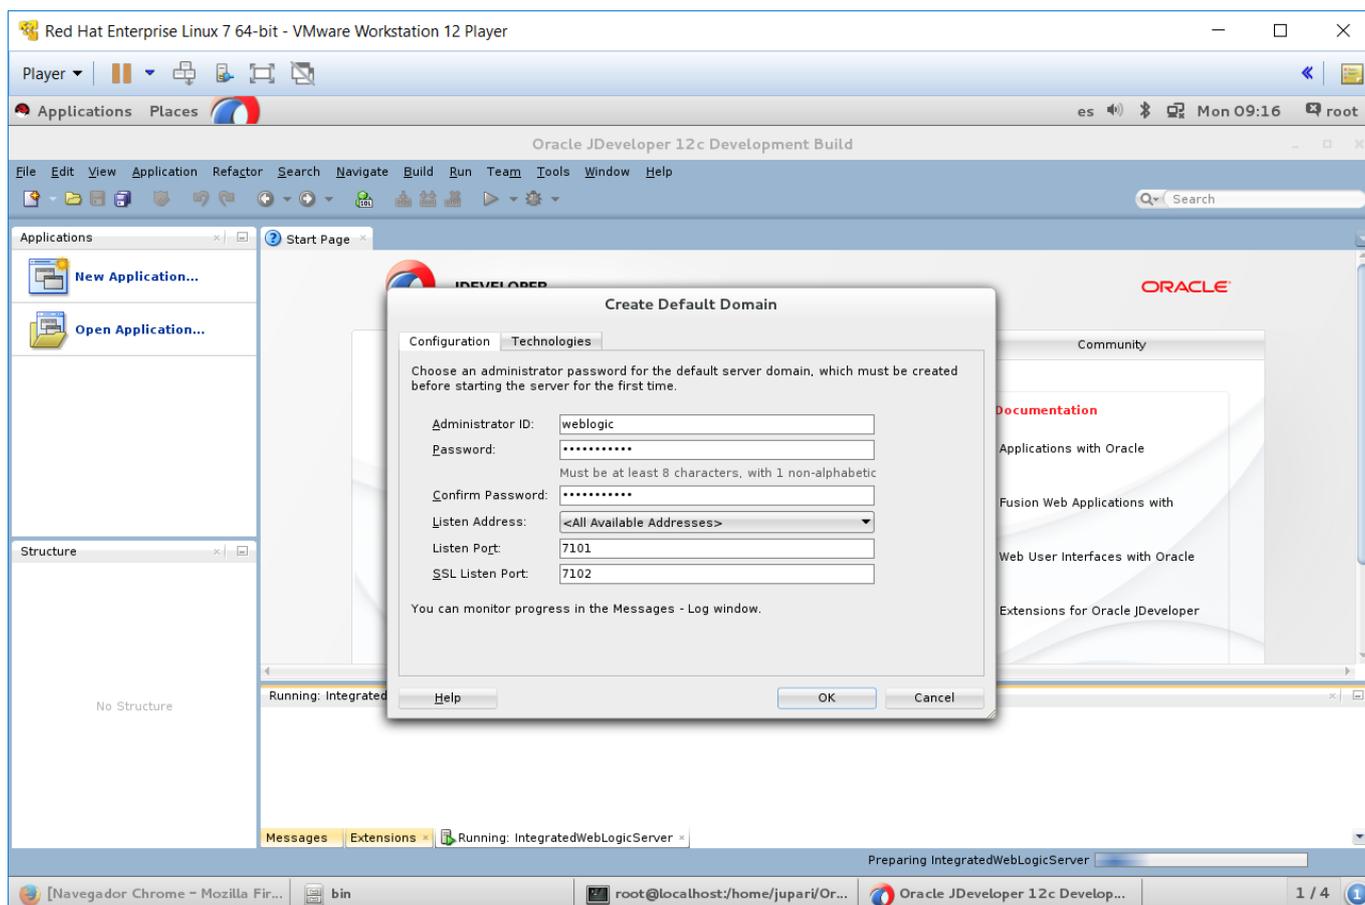

Acceder a Oracle Web Logic

- **URL:** `http://127.0.0.1:7101/console/`
- **username:** weblogic
- **password:** weblogic123

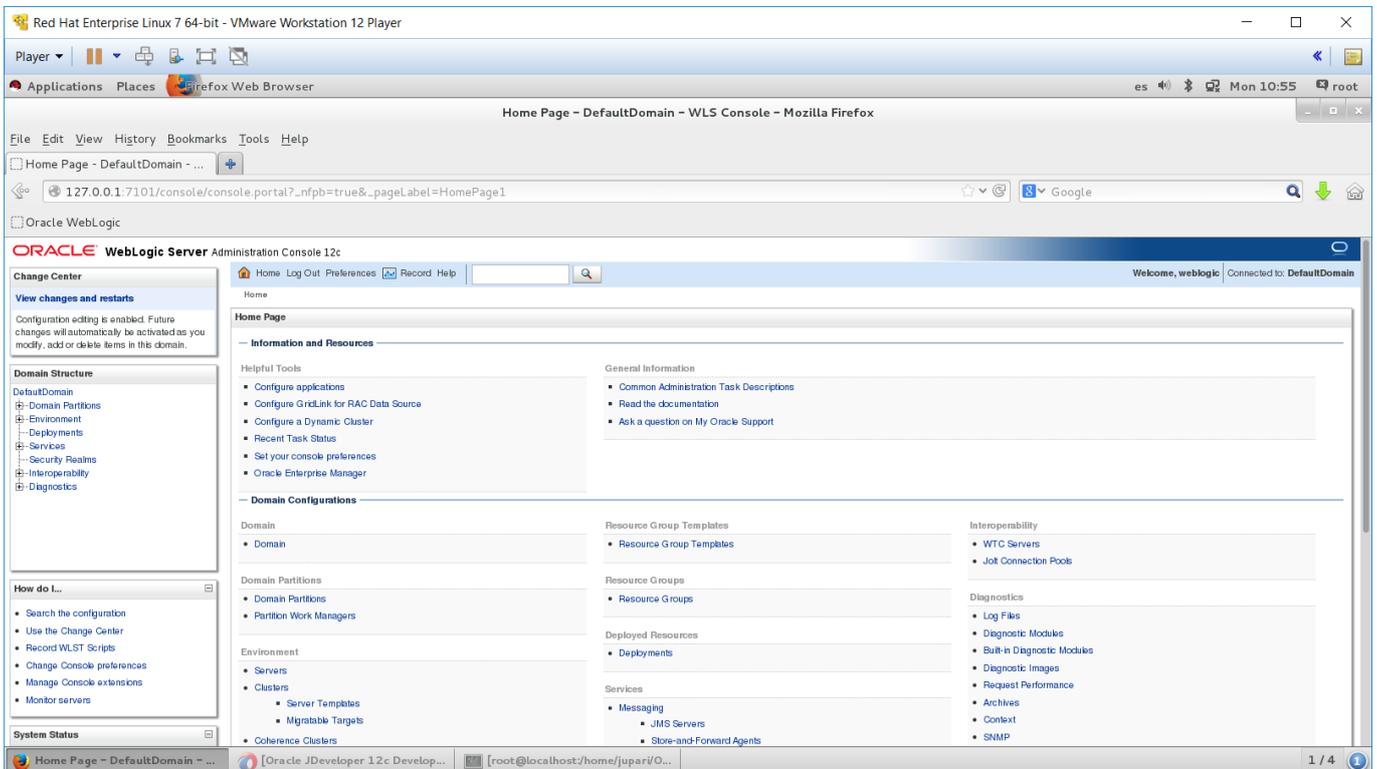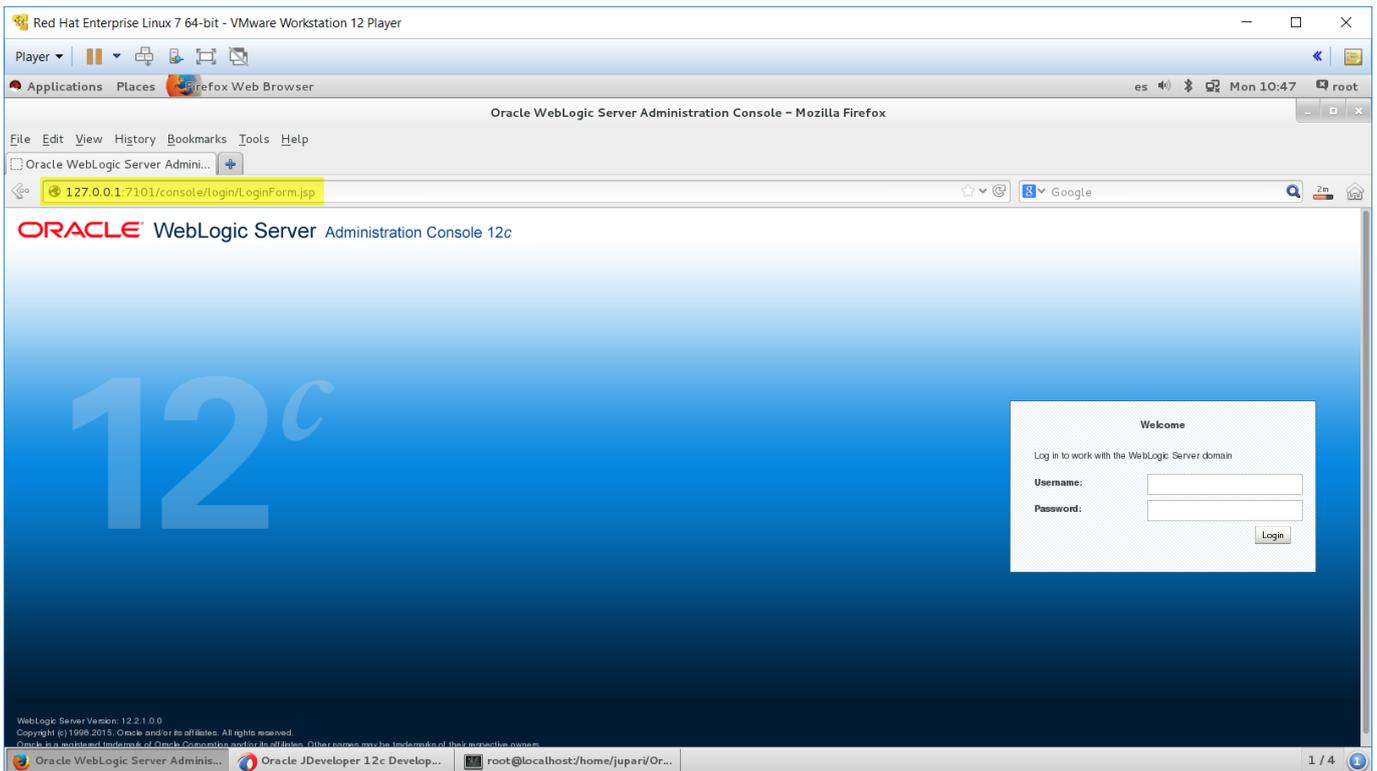

Acceder a Oracle Service Bus (OSB)

- **URL:** <http://127.0.0.1:7101/servicebus/faces/login>

- **username:** weblogic
- **password:** weblogic123

The image shows two screenshots of a VMware Workstation 12 Player running Red Hat Enterprise Linux 7 64-bit. The top screenshot shows the login page of the Service Bus Console 12c. The browser address bar shows the URL `127.0.0.1:7101/servicebus/faces/login`. The page features a blue header with a white circular icon containing a document and a pencil. Below the header, the text "SIGN IN TO SERVICE BUS CONSOLE 12C" is displayed. There are two input fields for "User Name" and "Password", and a blue "Sign In" button.

The bottom screenshot shows the main interface of the Service Bus Console 12c. The browser address bar shows the URL `127.0.0.1:7101/servicebus/faces/resources`. The page has a white background with a blue header. The Oracle logo is visible in the top left corner. The page title is "ORACLE Service Bus Console 12c". There is a search bar for resources by name and a "Designer" button. A sidebar on the left shows a tree view with "All Projects", "default", and "System".

ArquitecturaIBM Consulting

