


To install jq using Git Bash, you have to open Git Bash as an administrator.


To run Git Bash as an administrator:

1. Click on the Search bar and type «Git Bash».
2. Right-click on the «Git Bash» application and click «Run as administrator».

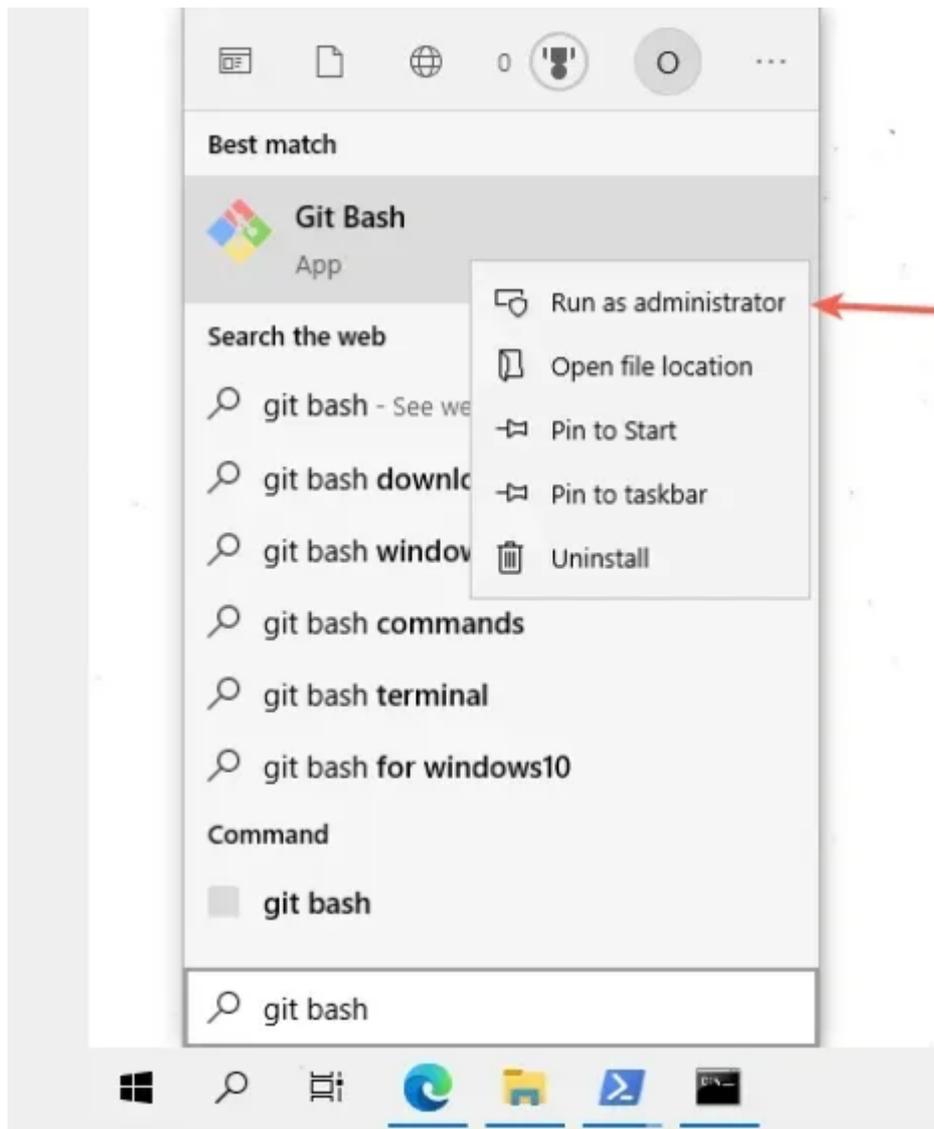

3. Issue the following command.

```
curl -L -o /usr/bin/jq.exe  
https://github.com/stedolan/jq/releases/latest/download/jq-win64.exe
```

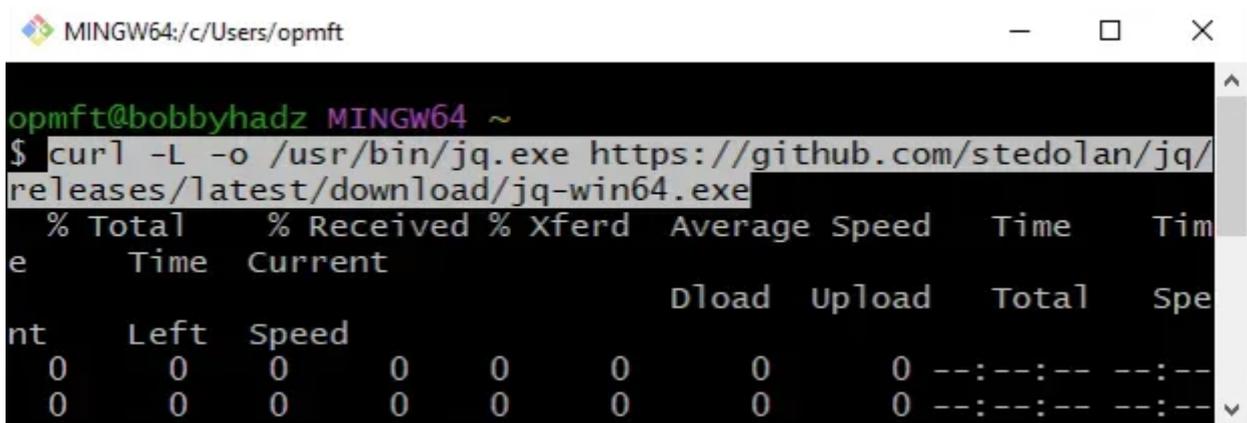


```
MINGW64:/c/Users/opmft
opmft@bobbyhadz MINGW64 ~
$ curl -L -o /usr/bin/jq.exe https://github.com/stedolan/jq/releases/latest/download/jq-win64.exe
```

% Total	% Received	% Xferd	Average	Speed	Time	Time
e	Time	Current	Dload	Upload	Total	Spe
0	0	0	0	0	0	0
0	0	0	0	0	0	0

Make sure jq is installed with the `jq --version` command.

```
jq --version
```

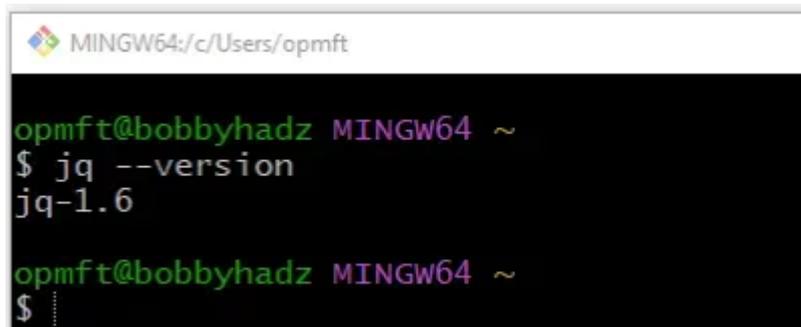

```
MINGW64:/c/Users/opmft
opmft@bobbyhadz MINGW64 ~
$ jq --version
jq-1.6
opmft@bobbyhadz MINGW64 ~
$
```

ArquitecturaIBM Consulting

