
To install `jq` using Git Bash, you have to open Git Bash as an administrator.


To run Git Bash as an administrator:

1. Click on the Search bar and type «Git Bash».
2. Right-click on the «Git Bash» application and click «Run as administrator».

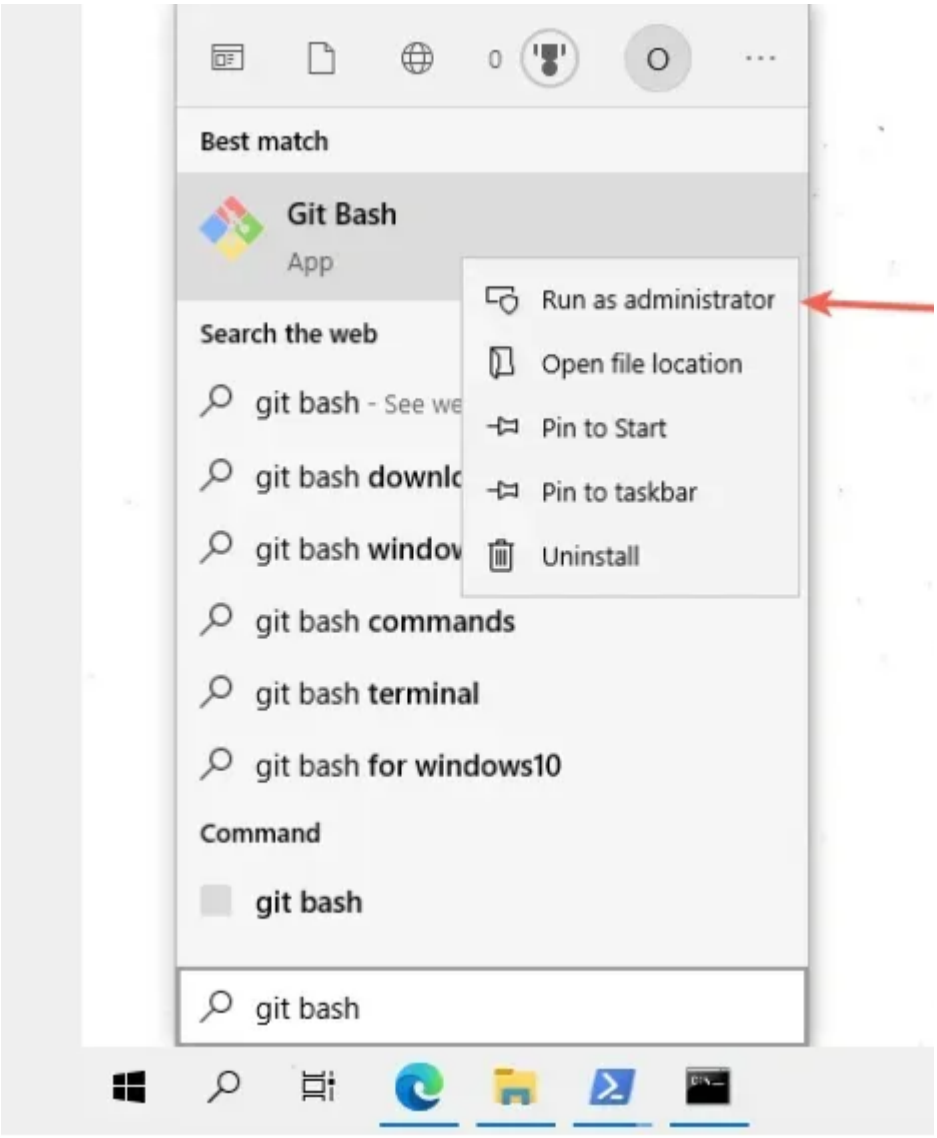



3. Issue the following command.

```
curl -L -o /usr/bin/jq.exe
https://github.com/stedolan/jq/releases/latest/download/jq-win64.exe
```

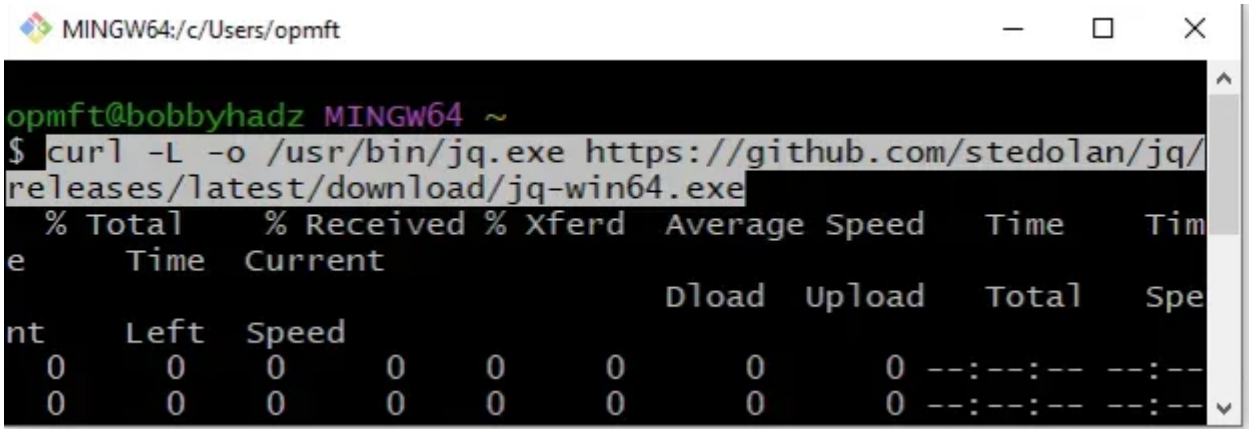


Make sure `jq` is installed with the `jq --version` command.

```
jq --version
```

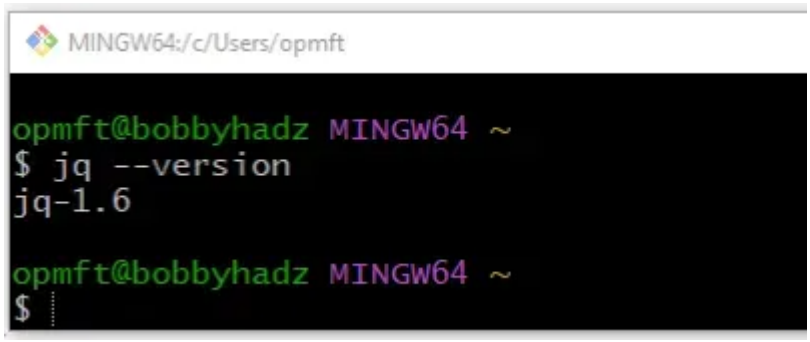


---

## ArquitecturaIBM Consulting



---