


To install jq using Git Bash, you have to open Git Bash as an administrator.


To run Git Bash as an administrator:

1. Click on the Search bar and type «Git Bash».
2. Right-click on the «Git Bash» application and click «Run as administrator».

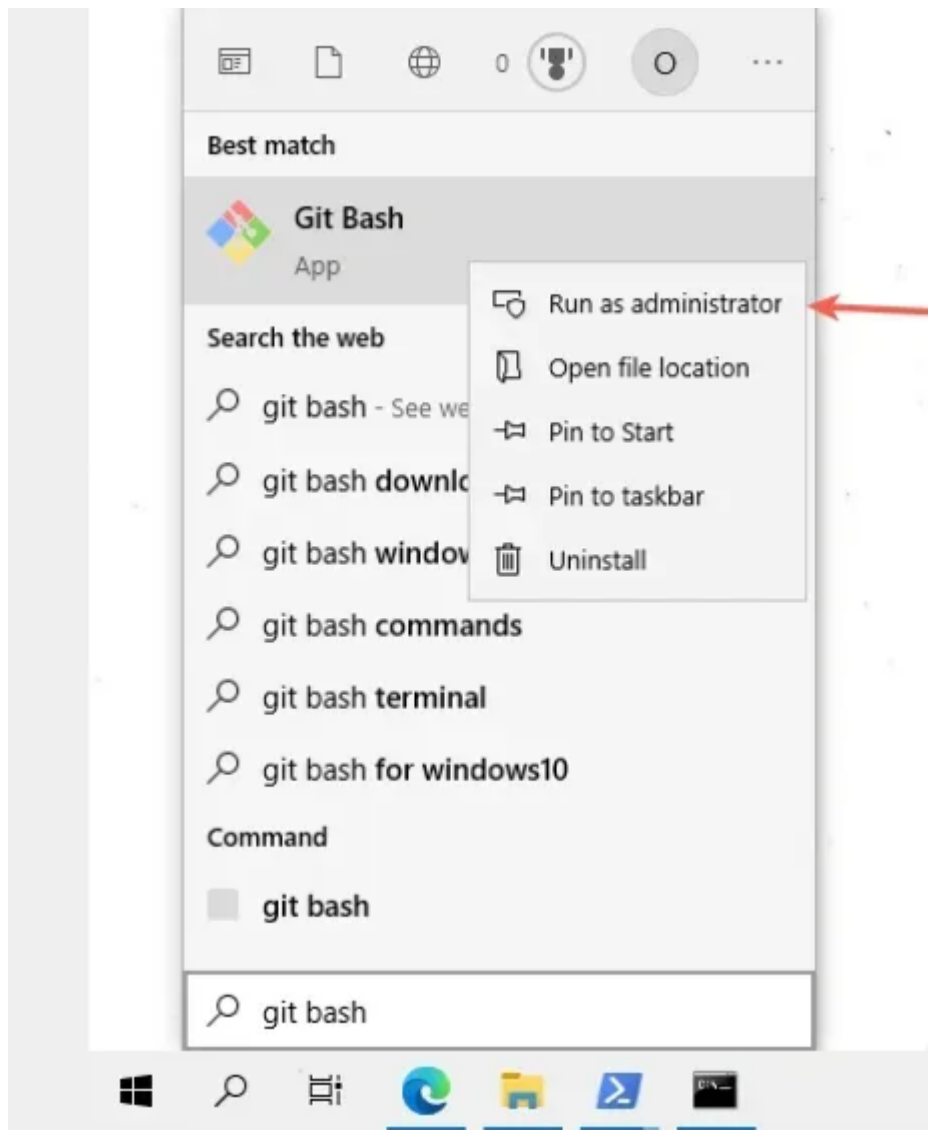

3. Issue the following command.

```
curl -L -o /usr/bin/jq.exe  
https://github.com/stedolan/jq/releases/latest/download/jq-win64.exe
```

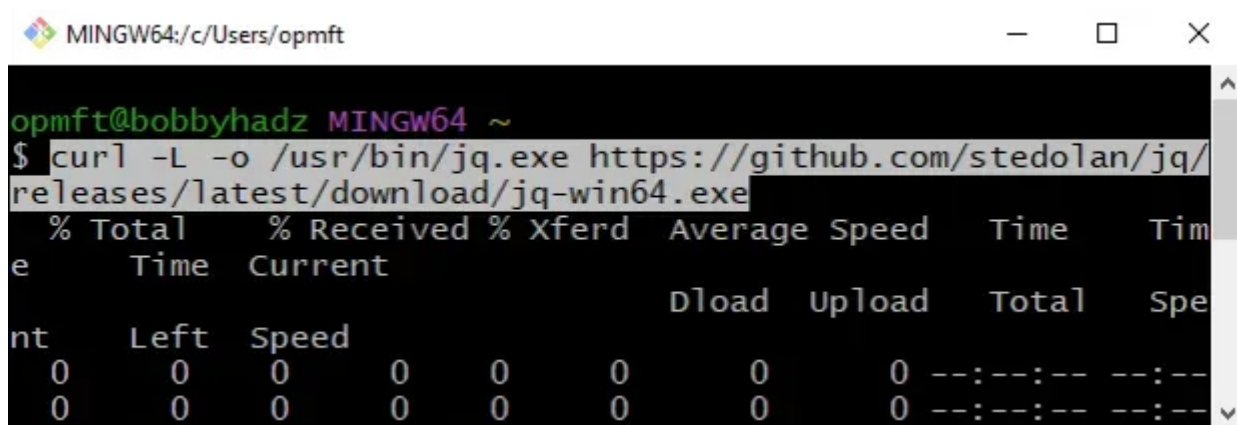


```
MINGW64:/c/Users/opmft
opmft@bobbyhadz MINGW64 ~
$ curl -L -o /usr/bin/jq.exe https://github.com/stedolan/jq/
releases/latest/download/jq-win64.exe
% Total    % Received % Xferd  Average Speed   Time    Time
e         Time Current          Dload  Upload   Total   Spe
nt      Left  Speed
  0     0    0     0     0     0     0     0  --:--:--  --:--:
  0     0    0     0     0     0     0     0  --:--:--  --:--:

```

Make sure jq is installed with the `jq --version` command.

```
jq --version
```

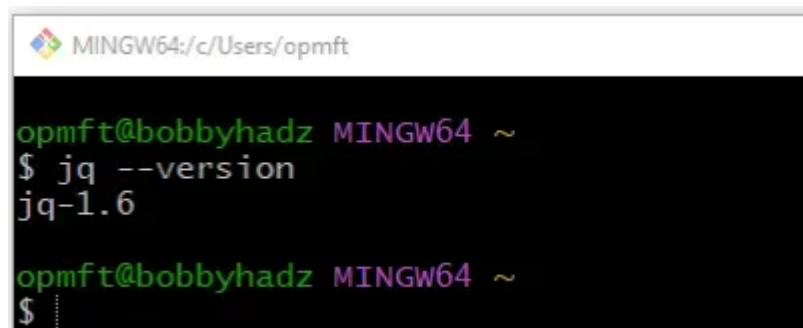

```
MINGW64:/c/Users/opmft
opmft@bobbyhadz MINGW64 ~
$ jq --version
jq-1.6
opmft@bobbyhadz MINGW64 ~
$

```

---

## Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn:

<https://www.linkedin.com/in/juliopari/>

---