


[PingFederate OAuth Endpoints.postman_collection.zip](#)

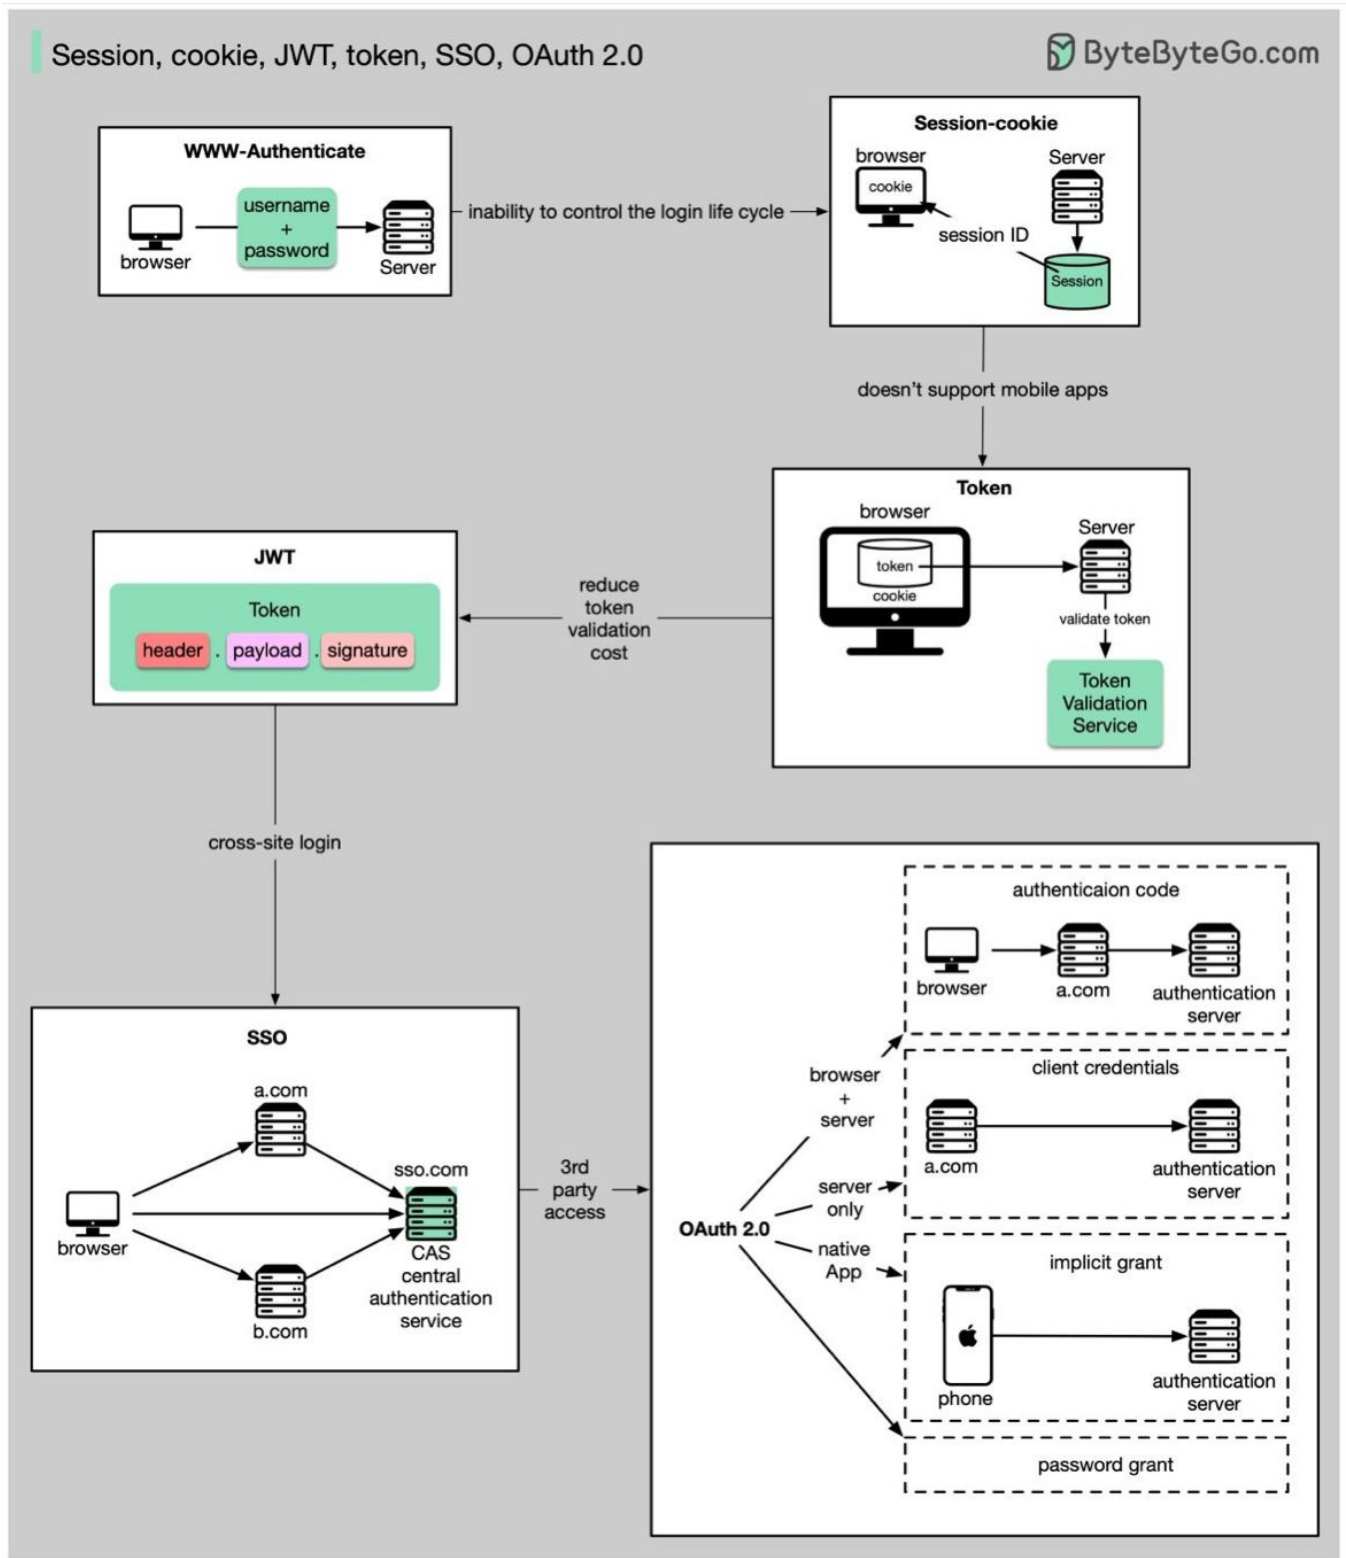

Source: <https://blog.bytebytego.com/p/ep34-session-cookie-jwt-token-sso>

OAuth2 flow authorization_code

Step 1

```
curl --location -g --  
request GET 'https://{{URL}}/as/authorization.oauth2?response_type=code&client_id={{client_id}}&redirect_uri={{redirect_uri}}&scope=openid profile'
```

Step 2

```
curl --location -g --  
request POST 'https://{{URL}}/as/token.oauth2?grant_type=authorization_code&redirect_uri={{redirect_uri}}&code=A9n8KAeWuo0vtTEj_oc4qSISHx1MYhwSTBQWIHwU%23/' \  
--header 'Content-Type: application/x-www-form-urlencoded' \  
--header 'Authorization: Basic  
e3tjbGllbnRfaWR9fTp7e2NsaWVudF9zZWNyZXR9fQ=='
```

OAuth2 flow implicit

Julio Pari (IT Architect IBM)



Si te ha interesado este artículo y deseas un apoyo o asesoría en algún requerimiento, envíame un mensaje a: (info@juliopari.com) o sino a través de LinkedIn:

<https://www.linkedin.com/in/juliopari/>
